




# CITEL

## UL TYPE 1 SPD - I<sub>max</sub> 80kA - I<sub>n</sub> 20kA -Modular DIN RAIL

### DAC84US-277Y



- UL1449 5th edition
- Type 1 SPD
- I<sub>max</sub>-80kA
- I<sub>n</sub>-20kA
- Visual fault indicator and remote contacts
- Pluggable/Replaceable Modules
- QR Code Linked Installation Sheet
- 10-Year warranty

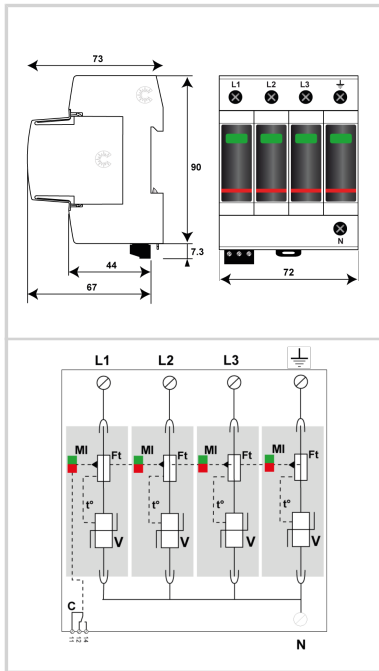

#### Características eléctricas

POWER SPD TYPE	UL1449 TYPE 1 LISTED	
TENSION	(V)	480/277
AC/DC/DC PV/RF	AC	
FASE	(PH)	3Y
AMPS	(A)	N/A
AMBIENT MIN	(C)	-40
AMBIENT MAX	(C)	+85
MODOS	L-L, L-N, L-G, N-G	
VPR	(V)	2500/1500/2500/1000
MCOV	(V)	840/420/740/320
I <sub>N</sub>	(kA)	20
I <sub>cc cortocircuito</sub>	(kA)	200
I <sub>MAX</sub>	(kA)	80
RELATIVE HUMIDITY	(%)	95%

#### Características mecánicas

TECNOLOGIA	Multi-MOV	
CONFIGURACION DE RED	3PH, 4W+G, Wye	
FORMA DE CONEXION	Screw Terminal (4-14AWG)	
MONTAJE	DIN RAIL	
MATERIAL	Thermoplastic UL94-V0	
NEMA RATING (IP RATING)	NEMA 2 (IP20)	
DESCONEXION SEGURA	Yes, no upstream over current protection required	
REAL-TIME DIAGNOSTICS	Visual indicator and remote contacts	
DIMENSIONS	See diagram	
WEIGHT	1.32 lbs	

#### Normas

Certificación	UL Listed	
Normas ambientales	EU RoHS	
UL STANDARD	UL1449 5th Edition	
UL CATEGORY	VZCA, VZCA7	
UL FILE NUMBER	E326289	
NORMAS	NOM-003-SCFI-2014, NOM-001-SCFI-1993	

#### Código

55110063

