




CITEL

UL TYPE 1 SPD - I_{max} 80kA - I_n 20kA -Modular DIN RAIL

DAC84US-347Y



- UL1449 5th edition
- Type 1 SPD
- I_{max}-80kA
- I_n-20kA
- Visual fault indicator and remote contacts
- Pluggable/Replaceable Modules
- QR Code Linked Installation Sheet
- 10-Year warranty

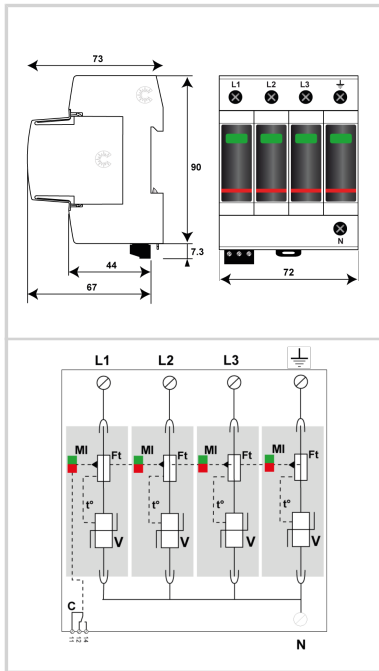

Características eléctricas

POWER SPD TYPE	UL1449 TYPE 1 LISTED	
TENSION	(V)	600/347
AC/DC/DC PV/RF	AC	
FASE	(PH)	3Y
AMPS	(A)	N/A
AMBIENT MIN	(C)	-40
AMBIENT MAX	(C)	+85
MODOS	L-L, L-N, L-G, N-G	
VPR	(V)	3000/1500/3000/1500
MCOV	(V)	920/460/880/420
I _N	(kA)	20
I _{cc cortocircuito}	(kA)	200
I _{MAX}	(kA)	80
RELATIVE HUMIDITY	(%)	95%

Características mecánicas

TECNOLOGIA	Multi-MOV	
CONFIGURACION DE RED	3PH, 4W+G, Wye	
FORMA DE CONEXION	Screw Terminal (4-14AWG)	
MONTAJE	DIN RAIL	
MATERIAL	Thermoplastic UL94-V0	
NEMA RATING (IP RATING)	NEMA 2 (IP20)	
DESCONEXION SEGURA	Yes, no upstream over current protection required	
REAL-TIME DIAGNOSTICS	Visual indicator and remote contacts	
DIMENSIONS	See diagram	
WEIGHT	1.32 lbs	

Normas

Certificación	UL Listed	
Normas ambientales	EU RoHS	
UL STANDARD	UL1449 5th Edition	
UL CATEGORY	VZCA, VZCA7	
UL FILE NUMBER	E326289	
NORMAS	NOM-003-SCFI-2014, NOM-001-SCFI-1993	

Código

55110065

