





CITEL

UL TYPE 1 SPD - I_{max} 25kA - I_n 20kA - AC Panel Mount

M25-120T-A

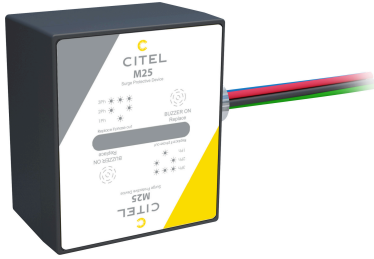

- Hybrid Technology
- UL1449 5th Ed. Type 1 LISTED
- 25kA Surge Current Rating per phase
- I_{max} total 50kA
- Visual LED fault indicator
- NEMA 6 (exceeds NEMA 4X or 4)
- 10-Year warranty

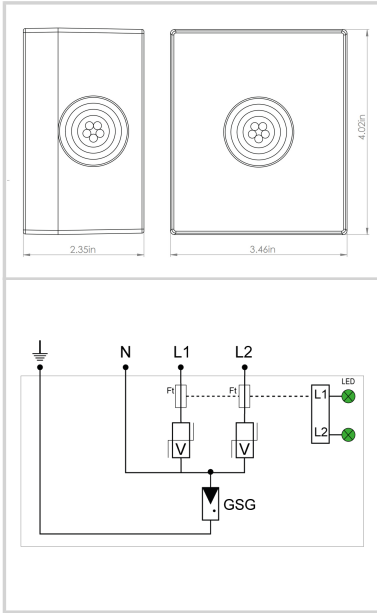

Características eléctricas		
POWER SPD TYPE		UL1449 TYPE 1 LISTED
TENSION	(V)	240/120
AC/DC/DC PV/RF		AC
FASE	(PH)	1S
AMPS	(A)	N/A
AMBIENT MIN	(C)	-35
AMBIENT MAX	(C)	+80
MODOS		L-L, L-G
VPR	(V)	1200/-/1200/-
MCOV	(V)	280/-/140/-
IN	(kA)	20
I _{cc} <i>cortocircuito</i>	(kA)	150
IMAX	(kA)	25
Características mecánicas		
TECNOLOGIA		MOV-GSG
CONFIGURACION DE RED		1PH, 2W+G, Split Phase
FORMA DE CONEXION		36" #12 AWG LEADS
MONTAJE		SIDE MOUNT, THREADED M22 or 1/2" NPT ADAPTER
MATERIAL		Aluminum cast
NEMA RATING (IP RATING)		6 (IP66)
DESCONEXION SEGURA		Yes, no upstream over current protection required
REAL-TIME DIAGNOSTICS		LED Indicator
DIMENSIONS		See diagram
WEIGHT		2.5 lbs.
Normas		
Certificación		UL Listed
Normas ambientales		EU RoHS
UL STANDARD		UL1449 5th Edition
UL CATEGORY		VZCA
UL FILE NUMBER		E326289
NORMAS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
Código		
751205		

