





CITEL

UL121201 Hazardous Locations- In 5kA

MDL-28-R



- ▶ Hybrid SAD-GDT Technology
- ▶ UL497B LISTED
- ▶ 20kA I_{max} (1x-8/20us)
- ▶ 5kA I_{imp} (2x-10/350us)
- ▶ 5kA I_n (10x-8/20us)
- ▶ Modular
- ▶ 2W+SHIELD+G

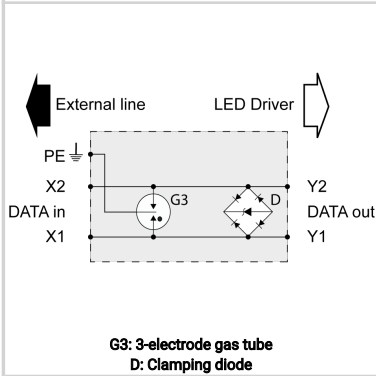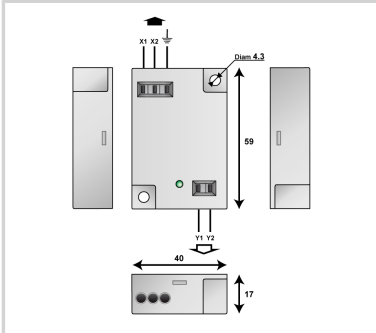

Electrical Characteristics	
Network	Digital communication (2-Wire)
Protection modes (network)	CM / DM
Lightning Protection Zones (LPZ)	1 - 3
Nominal line voltage	U _n 24 Vdc
Max. DC operating voltage	U _c 28 Vdc
Cut-off frequency -3dB, 100 ohm system	f max. > 30 MHz
Cut-off frequency -1dB, 100 ohm system	f max. > 10 MHz
Max. load current @25°C	I _L 500 mA
Signal rise/fall times, to BS EN IEC 62386-101:2022	t, t 3 μs
Nominal discharge current C2 (1.2/50μs / 8/20μs), 10 applications X-C (Line/Earth)	I _n 4 kV / 2 kA
Nominal discharge current CWG (1.2/50μs / 8/20μs) with 42 ohms, X-X (Line-Line), to IEC 61000-4-5 (unshielded asymmetric)	I _n 800 V / 20 A
Max. discharge current C2 (1.2/50μs / 8/20μs), 10 applications, X-C (Line-Earth)	20 kV / 10kA
Protection Level C3 (10/1000μs), 300 applications@10 A, Y-Y (Line/Line)	U _p < 40 V
Protection Level C2 (1.2/50μs / 8/20μs), 10 applications, Y-C (Line-Earth)	U _p < 1000 V
Protection Level CWG (1.2/50μs / 8/20μs) with 42 ohms, Y-Y (Line-Line), to IEC 61000-4-5 (unshielded asymmetric)	U _p < 48 V
Line resistance (± 10%)	< 0.2 ohms
Capacitance @1MHz X-C (Line/Earth)	C < 10 pF
Capacitance @1MHz X-X (Line-Line)	C < 30 pF
DATA SPD TYPE	UL497B LISTED
WIRES	2W+Shield+G
LINE CURRENT MAX	(A) 0.3
AMBIENT MIN	(C) -50
AMBIENT MAX	(C) +85
IN 10 impulses 8/20μs	(kA) 5
Mechanical Characteristics	
Technology	GDT+TVS diode
Connection to Network	2 spring terminals opposite side in/out - wire 1.5mm ² max.
Format	Plastic Enclosure with connectors input/output
Operating and storage temperature	-40/+85°C
Ingress Protection rating	IP20 (NEMA 2)
Failsafe mode	Transmission cut-off - Fault mode 2 (short-circuit)
TECHNOLOGY	SAD-GDT
CONNECTION METHOD	Screw terminal
MOUNTING	Din rail
DIMENSIONS	See diagram
Standards	
Certification	KEMA
Part number	
831611	

