




# CITEL

## TSP15M-S-48D3



- 1 Pair Protection
- Modes of Protection L-L,L-G
- Conduit Mounting-1/2 inch NPT
- Direct Transducer Mount
- Parallel or Series Connection Options
- BABA-Build America-Buy America Compliant

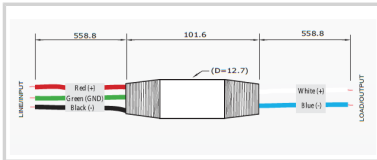

### Características eléctricas

TENSION	(V)	48
MAXIMUM LINE VOLTAGE	(V)	54
WIRES		4W+GROUND
LINE CURRENT MAX	(A)	0.3
AMBIENT MIN	(C)	-55
AMBIENT MAX	(C)	+85
PROTECTION LEVEL	(V)	82
IN	(kA)	10
IMAX	(kA)	15

### Instalación

Operating Relative Humidity	%RH	Can be submerged
Operating Altitude	Ft	2000.0000
Operating Altitude	Ft	6500.0000
Housing/Enclosure material		Stainless Steel
Mounting		Conduit-1/2" NPT
Installation Location		Indoor / outdoor
Product Dimension	mm	114.3000
Product Dimension	mm	26.0000
Product Dimension	mm	27.9400
Product Dimension	In	4.5000
Product Dimension	In	1.0000
Product Dimension	In	1.1000
Product Weight	lbs	0.8000

### Miscelánea

Individual Pack		Yes
-----------------	--	-----

### Características mecánicas

FORMA DE CONEXION		Series- #16 AWG Copper Wires-Tinned
-------------------	--	-------------------------------------

### Código

6339
------

