




# Indoor Cat. 6A 10Gb/s rated POE Surge Protective Device & Mounting Hardware Kit

# CITEL

## MJ8-POE-A



- ▶ POE++ compatible Surge Protector
- ▶ Shielded RJ45 connectors
- ▶ 16 kA total surge discharge capability
- ▶ Max Transmission up to 1Gbps
- ▶ Max Bandwidth up to 100 MHz
- ▶ UL497B

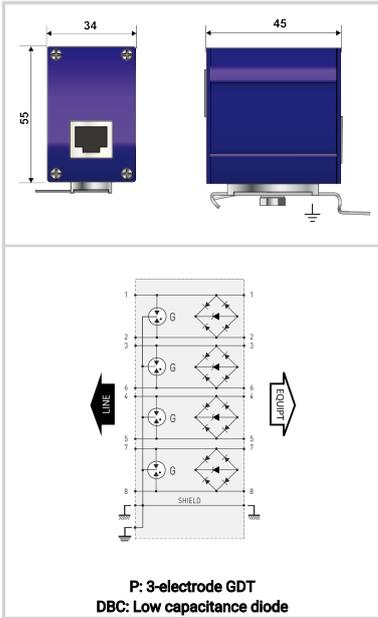

Electrical Characteristics		
Network		1Gb/s on Cat5E S/FTP cabling
Protection modes (network)		CM / DM
Protection modes (POE)		CM (Common Mode)
Transmission standard		IEEE 802.3bt
Lightning Protection Zones (LPZ)		0 - 3
Max. operating voltage (DATA)	Uc	60 Vdc
Max. operating voltage (POE)	Uc	60 Vdc
Max. frequency, in the channel	f max.	100 MHz
Max. data rate		1 Gbps
Max. load current @25°C	IL	2 A
Max. POE power (4PPOE)		100 W
Nominal discharge current C1 (1.2/50µs / 8/20µs), 300 applications X-X (Line/Line)	In	100V / 50A
Nominal discharge current C2 (1.2/50µs / 8/20µs), 10 applications X-C (Line/Earth)	In	4 kV / 2 kA
Max. discharge current max. withstand @ 8/20 µs, X-C (Line/Earth)	I <sub>max</sub>	2 kA
Max. discharge current max. withstand @ 8/20 µs, 8X-C (1&2+3&4+5+6+7&8 to Earth)	I <sub>max</sub> Total	16 kA
Protection Level C3 (10/1000µs), 300 applications@10 A, Y-Y (Line/Line)	Up	80 V
Protection Level C3 (10/1000µs), 300 applications@10 A, Y-C (Line/Earth)	Up	700 V
Protection Level C3 (10/1000µs), 300 applications @ 10A, (Pair-Pair, POE)	Up	700 V
Impulse current D1 (10/350µs), 2 applications, 8X-C (1&2+3&4+5+6+7&8 - Earth)	I <sub>imp</sub> Total	500 A
Line resistance (± 10%)		~ 0 ohms
Capacitance @1MHz, X-C (Line/Earth)	C	< 5 pF
Mechanical Characteristics		
Technology		GDT+TVS diode
Connection to Network		RJ45 shielded connectors Female input/output
Format		Metallic box with connectors input/output
Mounting		DIN rail / Wall / Plate
Accessory(s) provided		Screw, washer, cable shoe, earthing plate, DIN rail adapter
Operating temperature	Tu	-40/+85°C
Ingress Protection rating		IP20 (NEMA 2)
Failsafe mode		Transmission cut-off - Fault mode 2 (short-circuit)
Pinout		(1-2)(3-6)(4-5)(7-8)
NETWORK CONFIGURATION		Single POE Line
CONNECTOR TYPE		Shielded RJ45
PIN OUT		[1-2][3-6][4-5][7-8]
DIMENSIONS		See diagram
Standards		
Certification		UL listed
Environmental standards		EU RoHS
UL STANDARD		UL497B
UL CATEGORY		QVGG
UL FILE NUMBER		E184939
STANDARDS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
Part number		
<b>581519</b>		

