




CITEL



DS60VGPV-500

- UL Type 1 CA DC SPD
- VG Technology for Maximum Performance
- Zero Leakage Current
- Zero Current Working
- Iimp : 12.5kA/pole at 10/350µs
- In:20kA/pole at 8/20µs
- UL 1449 4th Edition Recognized

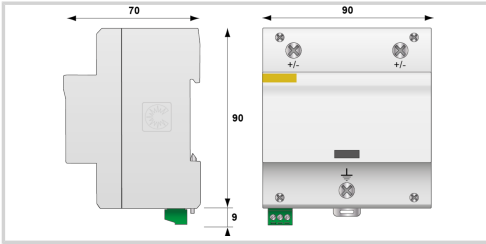

Características eléctricas		
Modo(s) de protección		Modo Común o Mode Diferenciado
Maximum Discharge Current	kA	40.0000
Maximum Discharge Current	kA	40.0000
Maximum Discharge Current	kA	40.0000
Voltage Protection Level	V	2500.0000
Voltage Protection Level	V	1800.0000
Voltage Protection Level	V	1800.0000
Opción		
Remote status dry contact electrical rating	V	250.0000
Remote status dry contact electrical rating	A	0.5000
RFI Filter		no
Instalación		
Wiring type		Screw
Solid wire cross section	mm ²	6.0000
Solid Wire cross section	mm ²	35.0000
Stranded Wire cross section	mm ²	6.0000
Stranded wire cross section	mm ²	35.0000
Wire gauge	AWG	9.0000
Wire gauge	AWG	2.0000
Torque	Nm	3.5-4
Torque	in-lbs	31-35.4
Strip Length	mm	16.0000
Strip Length	in	0.6300
Operating Temperature	°C	-40.0000
Operating Temperature	°C	85.0000
Operating Temperature	°F	-40.0000
Operating Temperature	°F	85.0000
Operating Relative Humidity	%RH	95
Operating Altitude	Ft	2000.0000
Operating Altitude	Ft	6500.0000
Housing/Enclosure material		Thermoplastic
Flammability rating		V0
Mounting		Din Rail
IP Environmental rating		IP20
NEMA Environmental rating		NEMA 1
Installation Location		Indoor
Product Dimension	mm	99.0000
Product Dimension	mm	70.0000
Product Dimension	mm	72.0000
Product Dimension	In	3.9000
Product Dimension	In	2.7600
Product Dimension	In	2.8400
Miscelánea		
Individual Pack		Yes
Storage Temperature	°C	-40.0000
Storage Temperature	°C	85.0000
Storage Temperature	°F	-40.0000
Storage Temperature	°F	85.0000
Storage Relative Humidity	%RH	95.0000
Características mecánicas		
Tecnología		Tecnología VG (MOV+GSG)
Conexión a la red		Por terminales de tornillos 4-25 mm ²
Formato		Cajas modular unipolar ensamblados
Modo de fallo		Desconexión de la protección de la línea FV
Código		
3948		





CITEL

DS60VGPV-500

