

- UL497E LISTED - Imax 20kA (10kA UL) - In 10kA (10kA UL) - Bi-directional - Replaceable Gas Tube

P8AX09-6G-SMA/MF



- Gas Discharge Tube Technology, DC Pass
- Frequency Range 0-6 GHz
- Imax 20kA, 10kA (UL), In 10kA
- IP67 Outdoor Rated
- SMA Type Connector
- Bi-Directional
- Replaceable Gas Tube

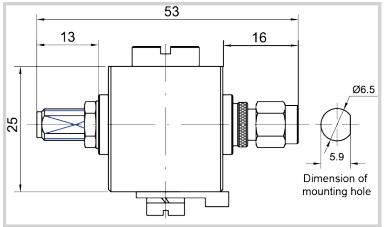

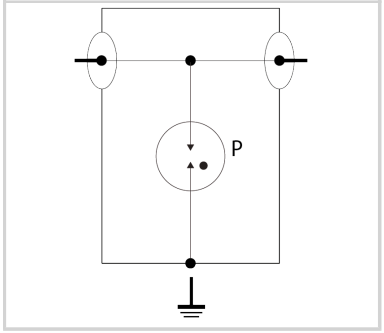



Electrical Characteristics		
Max. DC operating voltage	Uc	120 Vdc
Frequency range	f	DC-6 GHz
Insertion loss		< 0.3dB
Return loss		> 18 dB
Impedance		50 ohms
VSWR		<1.3:1
Max. load current @25°C	IL	10 A
Max. discharge current *max. withstand @ 8/20 µs by pole*	Imax	15 kA
Nominal discharge current *C2 Category*	In	5 kA
Protection mode(s)		Common mode
Impulse current *2 x 10/350µs Test - D1 Category*	limp	1 kA
Max RF Power		25 W
Typical let through energy *(50 ohms) input 4kV 1.2/50µs - 2kA 8/20µs*		2.2 mJ
DC Pass		Yes
Insulation resistance	IR	≥10 GOhms
RF SPD TYPE		UL497E LISTED
VOLTS	(V)	48
AC/DC/DC PV/RF		RF
WIRES		1W+GROUND
LINE CURRENT MAX	(A)	10
AMBIENT MIN	(C)	-40
AMBIENT MAX	(C)	+85
IMAX *8/20µs*	(kA)	20
FREQUENCY RANGE	(GHz)	0-6.9
INSERTION LOSS (@ FREQ)	(db)	<0.2
RETURN LOSS	(db)	22
VSWR		<1.25:1
Mechanical Characteristics		
Technology		Gas discharge tube
Connection to Network		Connector SMA Male/Female
Mounting		Feedthrough
Operating temperature	Tu	-40/+85°C
Protection rating		IP65
Failsafe mode		Short-circuit
Contacts		Bronze/Surface Au-Ag
Insulation material		PTFE
TECHNOLOGY		GDT
CONNECTION METHOD		SERIES CONNECTOR, BI-DIRECTIONAL
MOUNTING		BULKHEAD, OPTIONAL BRACKET
MATERIAL		Cu, Zn, Sn plated Brass, PTFE
NEMA RATING (IP RATING)		NEMA 6P (IP67)
DIMENSIONS		See diagram
WEIGHT		0.30 lbs
Standards		
Environmental standards		EU RoHS

- UL497E LISTED - Imax 20kA (10kA UL) - In 10kA (10kA UL) - Bi-directional - Replaceable Gas Tube

P8AX09-6G-SMA/MF

RohS compliance		Yes
UL STANDARD		UL497E
UL CATEGORY		QVLA
UL FILE NUMBER		E349646
STANDARDS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
Part number		
68501		

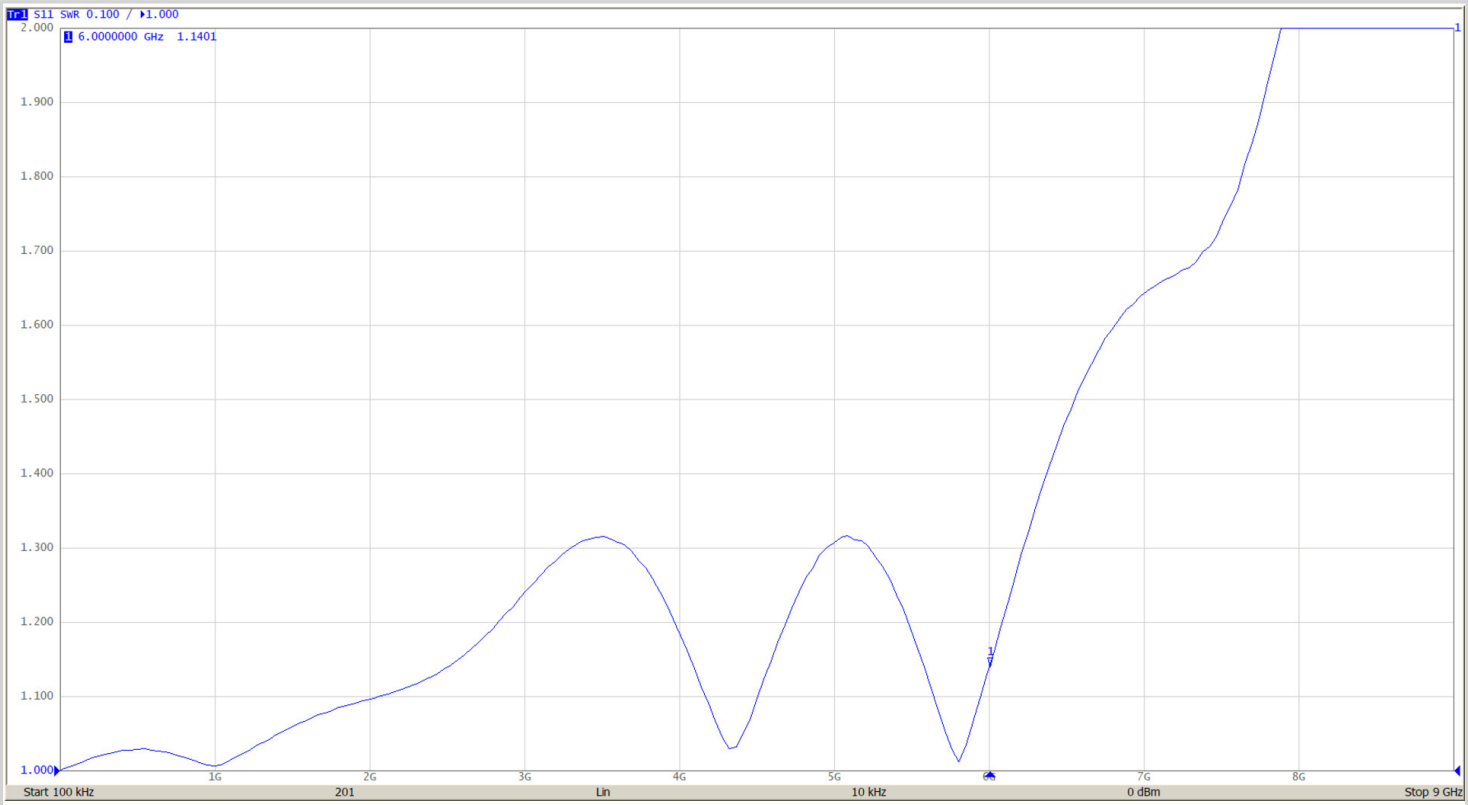

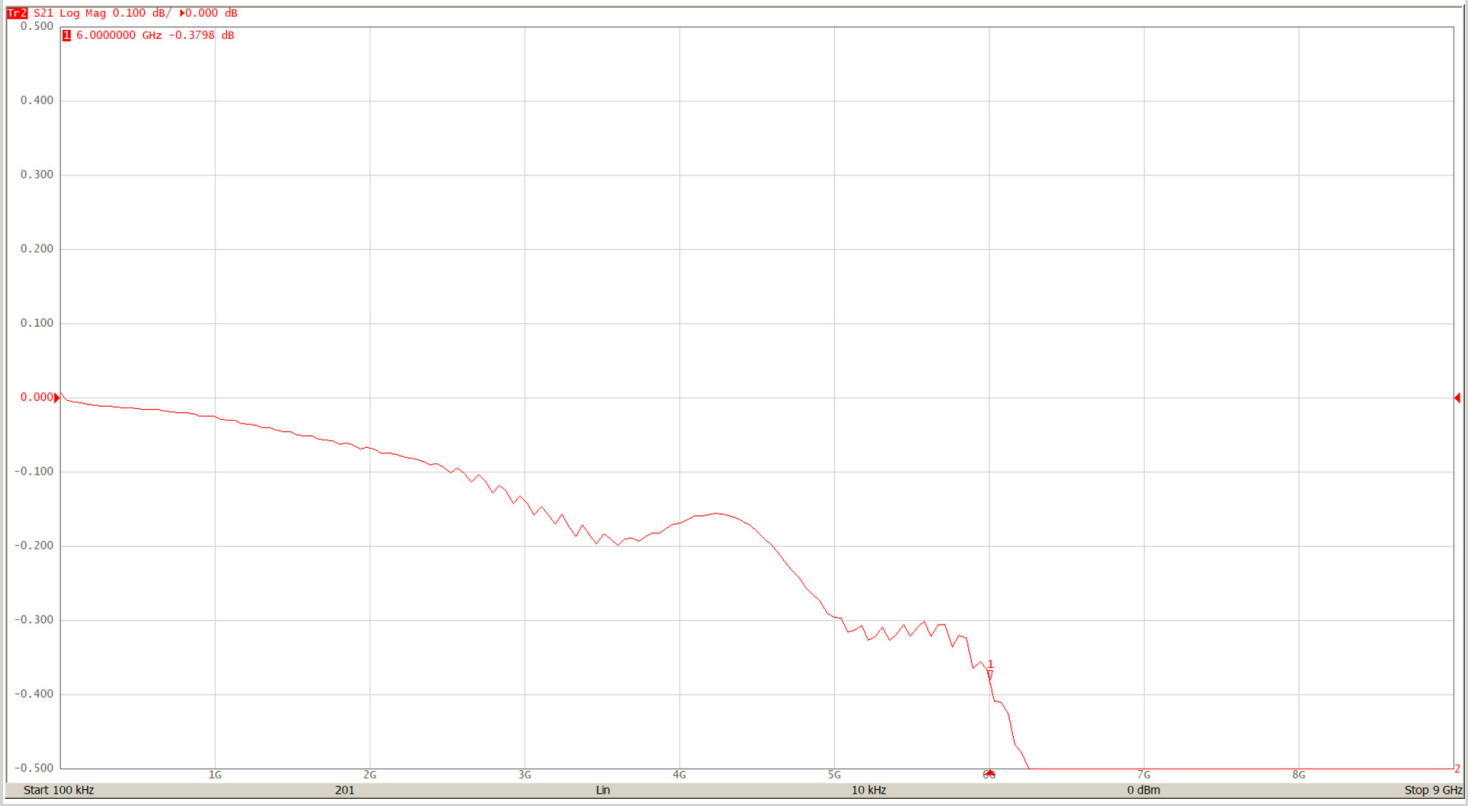

P8AX09-6G-SMA/MF

