
DS60VGPV-1000



- UL Type 1 CA DC SPD for PV Systems
  - VG Technology for Maximum Performance
  - Zero Leakage Current
  - Zero Current Working
  - Imax : 40kA/pole at 8/20µs
  - In : IEC 20kA/pole, UL 10kA/pole at 8/20µs
  - UL 1449 4th Edition Recognized

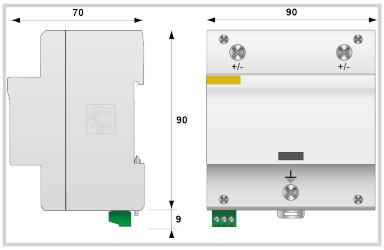

Electrical Characteristics		
Max. discharge current *max. withstand @ 8/20 µs by pole*	Imax	40 kA
Protection level +/PE (-/PE) *@ In (8/20µs)*	Up	2.8 kV
Voltage Protection Level *VPR*	V	4000.0000
Voltage Protection Level *VPR*	V	3000.0000
Voltage Protection Level *VPR*	V	3000.0000
Mechanical Characteristics		
Technology		VG Technology (MOV+GSG)
Connection to Network		By screw terminals: 4-25mm²
Mounting		Symmetrical rail 35 mm (EN 60715)
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Standards		
Certification		UL
Part number		
3947		