

MSB-130HF/US





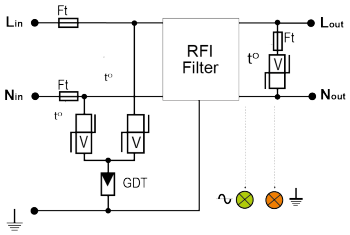

V: Varistor
GSG: Specific gas tube
RFI: RFI filtering
Ft: Thermal fuse
t°: Thermal disconnection system
LED: Operating indicator

Electrical Characteristics		
Network		230/400V
Max. AC operating voltage	Uc	255 Vac
Max. load current @25°C	IL	16 A
Max. discharge current *max. withstand @ 8/20 µs by pole*	Imax	10 kA
Protection mode(s)		Common/Differential mode
Mechanical Characteristics		
Technology		MOV+GDT+Filter
Connection to Network		Wires
Mounting		Wall
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection and AC line cut-off
CONNECTION METHOD		15" #14 AWG LEADS
Standards		
Certification		
Part number		
400		