


PAC40S-10-680

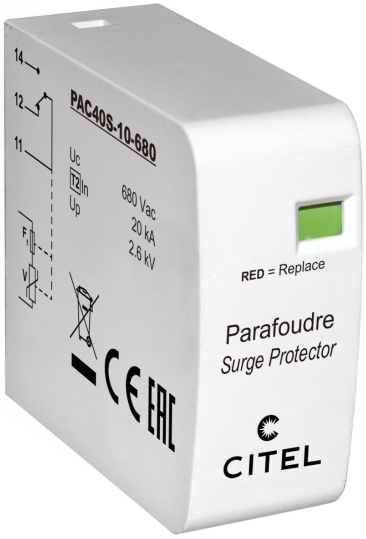



Electrical Characteristics		
Max. AC operating voltage	Uc	680 Vac
Max. discharge current *max. withstand @ 8/20 µs by pole*	Imax	40 kA
Maximum Discharge Current *Imax (8/20)*	kA	40.0000
Mechanical Characteristics		
Connection to Network		Through soldering pins
Mounting		On Printed Circuit Board
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Part number		
8712204		

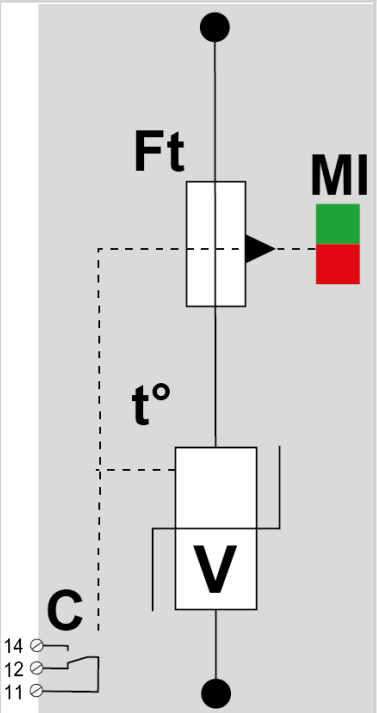

V: High-energy varistor
Ft: Thermal fuse
C: Remote signal contact
t°: Thermal disconnection system
MI: Disconnection indicator