
LSCM-D/230AC/P300



- Lightning and Surge Current Counter & SPD monitoring device
- Wide surge current detection range:
- 0.3/25 KA or 1/50 kA @10/350µs
- 0.3/50 kA or 1/100 kA @ 8/20 µs
- Front display for access to recorded events and device parameters
- Peak current and time stamping recording of the surge currents
- RS485 communication interface / MODBUS protocol
- Monitoring features: 2 inputs (SPD or disconnector status) / 1 output
- IEC 62561-6 compliance

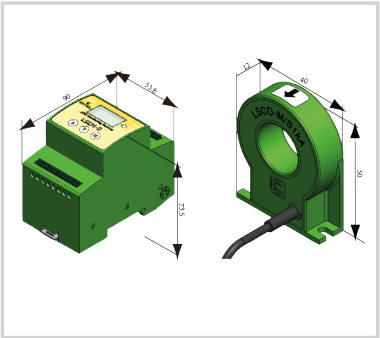

Características eléctricas		
Tensión AC máx. de functionamiento	Uc	230 Vac
Modo(s) de conexión		2 puertos PE de conexión
Nivel de sensibilidad mínimo	Itc	0.3 kA
Corriente máx. admisible	Imcw	50 kA (8/20µs) / 25 kA (10/350 µs)
Características mecánicas		
Wiring		Conexión por cable sensor: cable coaxial AWG26
Montaje		Carril DIN simetrico 35 mm (EN 60715)
Temperatura de funcionamiento y almacenamiento		-20/+60°C / -25 /+70°C
Clase de protección		IP20
Visualización		Red 128 * 64 para visualización OLED y indicator de estado: LED verde / rojo
FORMA DE CONEXION		• Counter: Spring-cage terminals - Sensor : Plug-in (1 sensor line port)
MONTAJE		Din Rail-Symmetrical 35mm (EN60715)
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 1 (IP20)
REAL-TIME DIAGNOSTICS		Two channel to input switching signal and one channel of output switching signal
DIMENSIONS		See diagram (mm)
Normas		
NORMAS		EN 62561.6
Código		
793533		