


# PAC40S-10-275

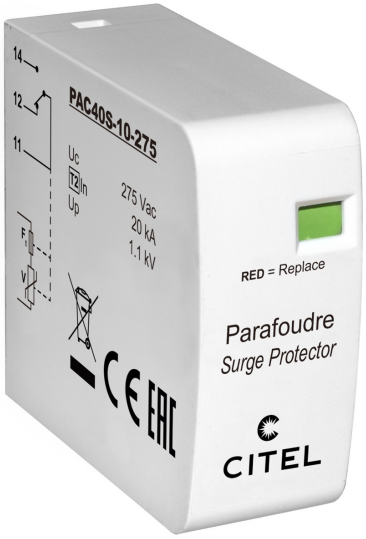


| Electrical Characteristics | | |
|---|---|---|
| Max. AC operating voltage | Uc | 275 Vac |
| Max. discharge current<br>*max. withstand @ 8/20 µs by pole* | Imax | 40 kA |
| Maximum Discharge Current<br>*Imax (8/20)* | kA | 40.0000 |
| **Mechanical Characteristics** | | |
| Connection to Network | | Through soldering pins |
| Mounting | | On Printed Circuit Board |
| Operating temperature | Tu | -40/+85°C |
| Protection rating | | IP20 |
| **Part number** | | |
| **8712207** | | |

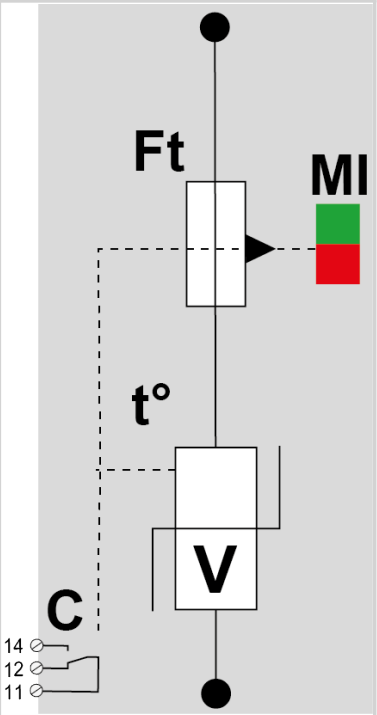


**V: High-energy varistor**
**Ft: Thermal fuse**
**C: Remote signal contact**
**t°: Thermal disconnection system**
**MI: Disconnection indicator**