
- UL497E LISTED - Imax 20kA (10kA UL) - In 10kA (10kA UL) - Bi-directional - Replaceable Gas Tube


P8AX25-6G-SMA/FF



- Gas Discharge Tube Technology, DC Pass
- Frequency Range 0-6 GHz
- Imax 20kA, 10kA (UL), In 10kA
- IP67 Outdoor Rated
- SMA Type Connector
- Bi-Directional
- Replaceable Gas Tube

RoHS

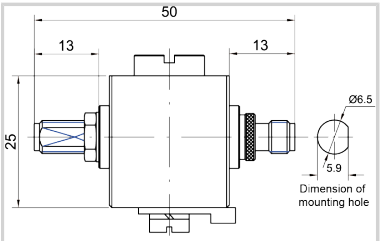

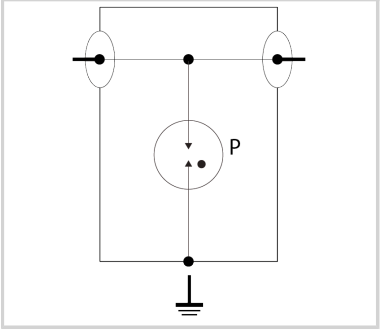



Electrical Characteristics		
Max. DC operating voltage	Uc	200 Vdc
Frequency range	f	DC-6 GHz
Insertion loss		< 0.3dB
Return loss		> 18 dB
Impedance		50 ohms
VSWR		<1.3:1
Max. load current @25°C	IL	10 A
Max. discharge current *max. withstand @ 8/20 µs by pole*	Imax	15 kA
Nominal discharge current *C2 Category*	In	5 kA
Protection mode(s)		Common mode
Impulse current *2 x 10/350µs Test - D1 Category*	Iimp	1 kA
Max RF Power		190 W
Typical let through energy *(50 ohms) input 4kV 1.2/50µs - 2kA 8/20µs*		2.2 mJ
DC Pass		Yes
Insulation resistance	IR	≥10 GOhms
RF SPD TYPE		UL497E LISTED
VOLTS	(V)	48
AC/DC/DC PV/RF		RF
WIRES		1W+GROUND
LINE CURRENT MAX	(A)	10
AMBIENT MIN	(C)	-40
AMBIENT MAX	(C)	+85
IMAX *8/20µs*	(kA)	20
FREQUENCY RANGE	(GHz)	0-6.9
INSERTION LOSS (@ FREQ)	(db)	<0.2
RETURN LOSS	(db)	22
VSWR		<1.25:1
Mechanical Characteristics		
Technology		Gas discharge tube
Connection to Network		Connector SMA Female/Female
Mounting		Feedthrough
Operating temperature	Tu	-40/+85°C
Protection rating		IP65
Failsafe mode		Short-circuit
Contacts		Bronze/Surface Au-Ag
Insulation material		PTFE
TECHNOLOGY		GDT
CONNECTION METHOD		SERIES CONNECTOR, BI-DIRECTIONAL
MOUNTING		BULKHEAD, OPTIONAL BRACKET
MATERIAL		Cu, Zn, Sn plated Brass, PTFE
NEMA RATING (IP RATING)		NEMA 6P (IP67)
DIMENSIONS		See diagram
WEIGHT		0.30 lbs
Standards		
Environmental standards		EU RoHS
RohS compliance		Yes

- UL497E LISTED - Imax 20kA (10kA UL) - In 10kA (10kA UL) - Bi-directional - Replaceable Gas Tube

P8AX25-6G-SMA/FF

UL STANDARD		UL497E
UL CATEGORY		QVLA
UL FILE NUMBER		E349646
STANDARDS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
Part number		
68514		

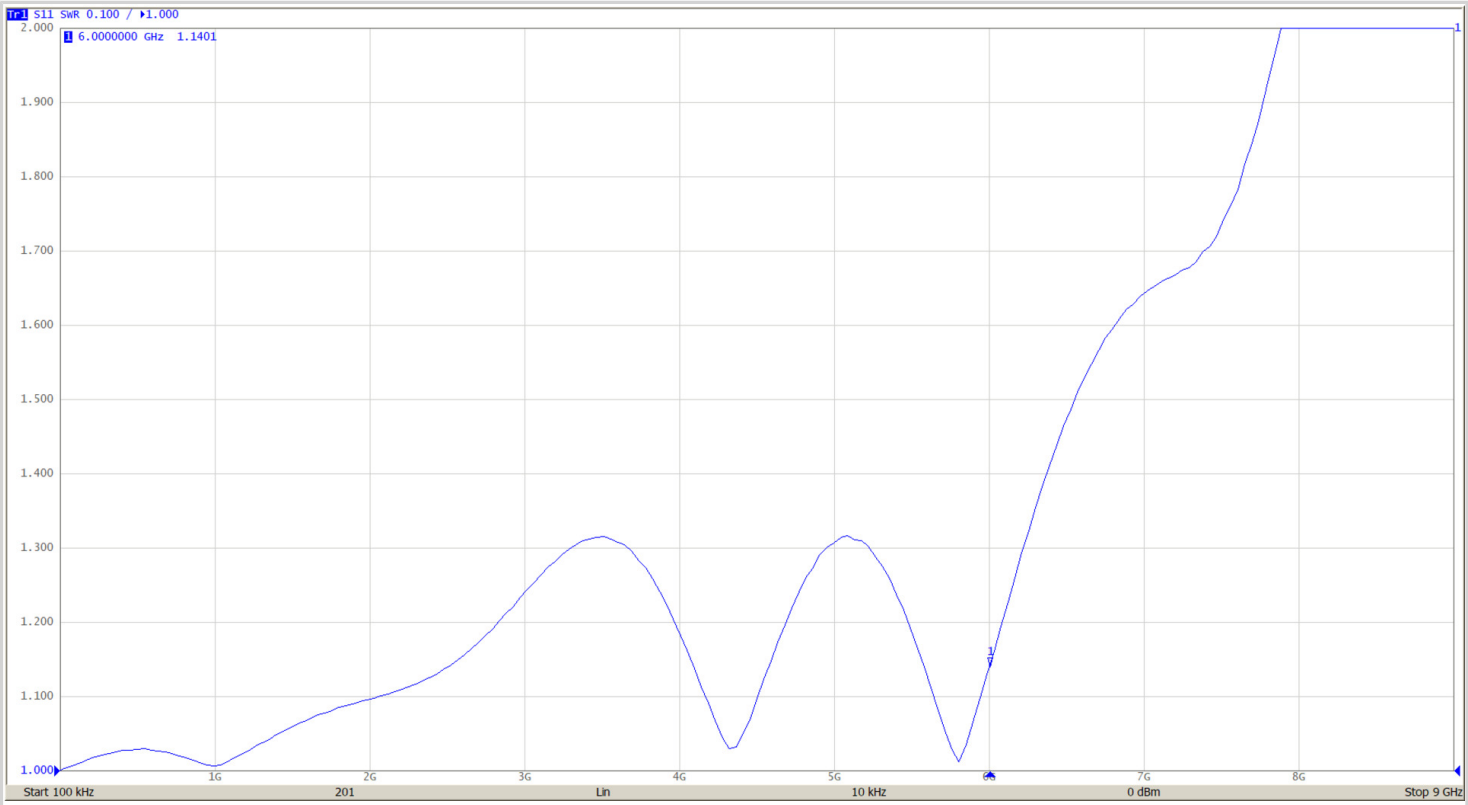

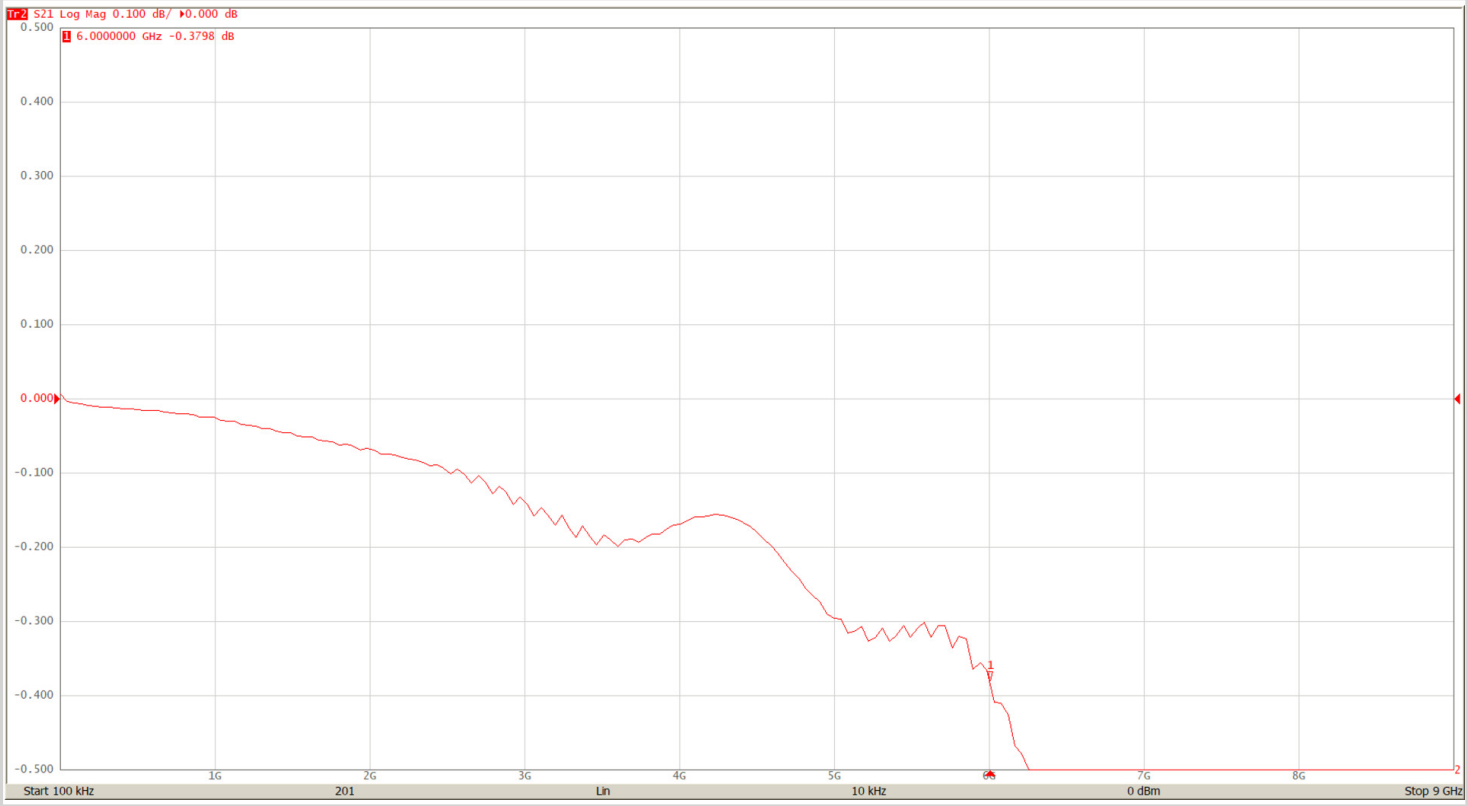

- UL497E LISTED - Imax 20kA (10kA UL) - In 10kA (10kA UL) - Bi-directional - Replaceable Gas Tube

P8AX25-6G-SMA/FF

