




CITEL

DS41S-600



- 1-pole 48 Vdc surge protector
- In 15 kA / I_{max} 30 kA
- Pluggable module
- Remote signaling
- IEC 61643-11 and EN 61643-11 compliance
- UL1449 ed.5 approved

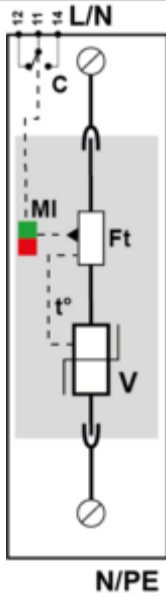

Características eléctricas		
AC/DC/DC PV/RF		AC
AMPS	(A)	N/A
AMBIENT MIN	(C)	-35
AMBIENT MAX	(C)	+60
IN	(kA)	20
IMAX	(kA)	40
I _{imp}	(kA)	4
Opción		
Remote status dry contact electrical rating	V	250.0000
Remote status dry contact electrical rating	A	0.5000
RFI Filter		no
Instalación		
Operating Altitude	Ft	6500.0000
Miscelánea		
Individual Pack		Yes
Storage Temperature	°C	-40.0000
Storage Temperature	°C	85.0000
Storage Temperature	°F	-40.0000
Storage Temperature	°F	85.0000
Características mecánicas		
Modo de fallo		Desconexión de la red Baja Tensión
FORMA DE CONEXION		SPD-Screw Terminal (8-12AWG), Terminal blocks 6AWG
MONTAJE		Din Rail
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
DESCONEXION SEGURA		Disconnection via fuse-link
REAL-TIME DIAGNOSTICS		Visual indicator and remote contacts
DIMENSIONS		See diagram
Normas		
Certificación		CSA / UL Listed
UL STANDARD		UL1449 5th Edition
UL FILE NUMBER		E326289
NORMAS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS		ROHS
Código		
331511		

