




CITEL

B280-T



- ↳ Hybrid SAD-GDT Technology
- ↳ UL497B LISTED
- ↳ 20kA I_{max}
- ↳ 5kA I_{imp}
- ↳ 5kA I_n

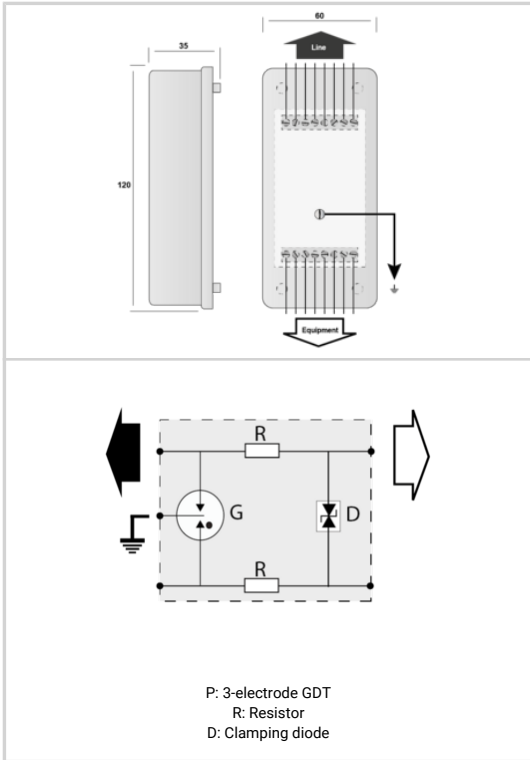

Electrical Characteristics		
Network		RTC, ADSL, SDSL, SHDSL
Max. DC operating voltage	U _c	170 Vdc
Max. frequency	f max.	> 10 MHz
Insertion loss		< 1 dB
Protection mode(s)		Common/Differential mode
Impulse current 2 x 10/350µs Test - D1 Category	I _{imp}	2.5 kA
Nominal discharge current C2 Category	I _n	5 kA
DATA SPD TYPE		UL497B LISTED
VOLTS	(V)	150
WIRES		4W+GROUND
LINE CURRENT MAX	(A)	0.3
AMBIENT MIN	(C)	-50
AMBIENT MAX	(C)	+85
RESIDUAL VOLTAGE	(V)	20
MCOV	(V)	170
I _N 10 impulses 8/20µs	(kA)	5
I _{MAX} 8/20µs	(kA)	20
I _{imp} 10/350µs	(kA)	5
DATA SPEED	(Mbps)	up to 10MHz
ELEC		
Max. load current@25°C	IL	300 mA
Mechanical Characteristics		
Technology		GDT+Clamping diode
Connection to Network		By screw terminal: cross section 0.4-1.5mm ²
Format		Wall mounting box
Failsafe mode		Short-circuit - transmission cut-off - fault mode 2
Weight		0.123 kg
TECHNOLOGY		SAD-GDT
NETWORK CONFIGURATION		4W+G
CONNECTION METHOD		RJ11 Connector
MOUNTING		Wall mount
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
DIMENSIONS		See diagram
WEIGHT		0.30 lbs
SPARE PART		n/a
Standards		
Certification		UL 497B
UL STANDARD		UL497B
UL CATEGORY		QVGQ
UL FILE NUMBER		E184939
STANDARDS		IEC 61643-11, NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS		ROHS
Part number		
72726		

