




# CITEL

## M50-347Y-B



- Hybrid MOV-GSG Technology
- 50kA Surge Current Rating per mode
- Extended life with no leakage current
- Visual LED fault indicator and audible alarm
- NEMA 6 (exceeds NEMA 4X or 4)
- 10-Year warranty

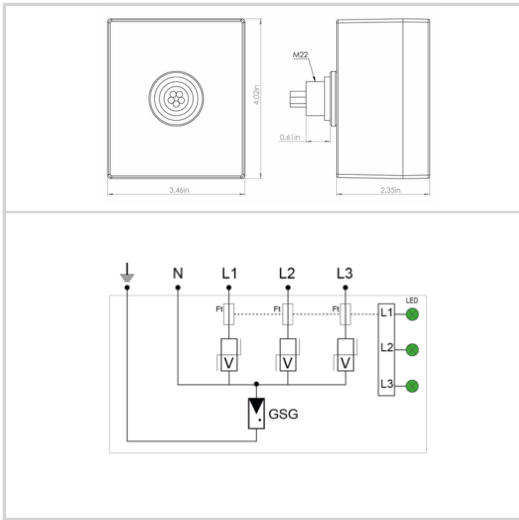

| Características eléctricas |      |   |
|----------------------------|------|---|
| POWER SPD TYPE             |      | -   |
| TENSION                    | (V)  | 347/600   |
| AC/DC/DC PV/RF             |      | AC  |
| FASE                       | (PH) | 3Y  |
| AMPS                       | (A)  | N/A   |
| AMBIENT MIN                | (C)  | -35   |
| AMBIENT MAX                | (C)  | +80   |
| MODOS                      |      | L-L, L-N, L-G, N-G                                |
| VPR                        | (V)  | 3000/1500/1800/1800                               |
| MCOV                       | (V)  | 690/400/400/350                                   |
| IN                         | (kA) | 20  |
| Icc cortocircuito          | (kA) | 150   |
| IMAX                       | (kA) | 50  |
| Características mecánicas  |      |   |
| TECNOLOGIA                 |      | MOV-GSG   |
| CONFIGURACION DE RED       |      | 3PH, 4W+G, Wye                                    |
| FORMA DE CONEXION          |      | 36" #12 AWG LEADS                                 |
| MONTAJE                    |      | BACK MOUNT, THREADED M22 (1/2" NPT ADAPTER)       |
| MATERIAL                   |      | Aluminum cast                                     |
| NEMA RATING (IP RATING)    |      | 6 (IP66)  |
| DESCONEXION SEGURA         |      | Yes, no upstream over current protection required |
| REAL-TIME DIAGNOSTICS      |      | LED and audible alarm                             |
| DIMENSIONS                 |      | See diagram                                       |
| WEIGHT                     |      | 2.5 lbs.  |
| Normas                     |      |   |
| NORMAS                     |      | NOM-003-SCFI-2014, NOM-001-SCFI-1993              |
| ENVIRONMENTAL STANDARDS    |      | ROHS  |
| Código                     |      |   |
| 751611                     |      |   |

