




UL TYPE 1 SPD - I_{max} 75kA - I_n 20/30kA - Modular Assembly

CITEL

DS72US-230S



- Multi-MOV Technology
- UL1449 Type 1 LISTED
- 75kA Surge Current Rating per module
- Visual fault indicator and remote contacts
- Replaceable Modules
- 10-Year warranty

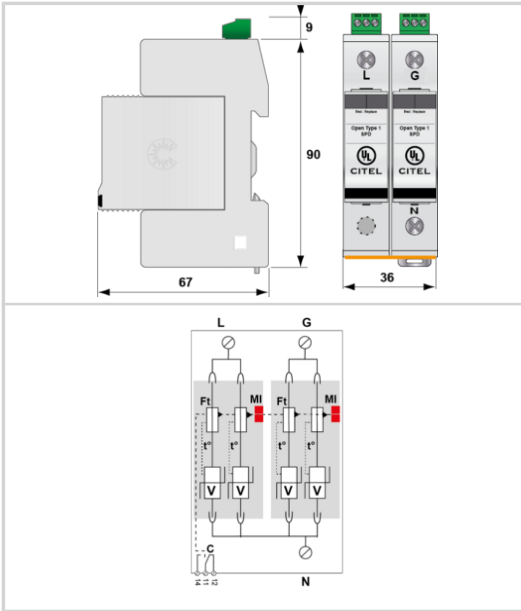

| Características eléctricas | |
|-------------------------------|---|
| POWER SPD TYPE | UL1449 TYPE 1 LISTED |
| TENSION | (V) 230 |
| AC/DC/DC PV/RF | AC |
| FASE | (PH) 1 |
| AMPS | (A) N/A |
| AMBIENT MIN | (C) -40 |
| AMBIENT MAX | (C) +85 |
| MODOS | L-L, L-G, L-N, N-G |
| VPR | (V) 1000/1800/900 |
| MCOV | (V) 320/595/275 |
| I _N | (kA) 20 |
| I _{cc cortocircuito} | (kA) 200 |
| I _{MAX} | (kA) 75 |
| RELATIVE HUMIDITY | (%) 95% |
| Características mecánicas | |
| TECNOLOGIA | Multi-MOV |
| CONFIGURACION DE RED | 2 pole, 2W+G, Single/Spilt Phase |
| FORMA DE CONEXION | Screw Terminal, 13-2AWG Solid Wire, 13-4AWG Stranded Wire |
| MONTAJE | Din Rail |
| MATERIAL | Thermoplastic UL94-V0 |
| NEMA RATING (IP RATING) | NEMA 2 (IP20) |
| DESCONEXION SEGURA | Yes, no upstream over current protection required |
| REAL-TIME DIAGNOSTICS | Visual indicator and remote contacts |
| DIMENSIONS | See diagram |
| WEIGHT | 0.60 lbs |
| Normas | |
| UL STANDARD | UL1449 5th Edition |
| UL CATEGORY | VZCA, VZCA7 |
| UL FILE NUMBER | E326289 |
| NORMAS | NOM-003-SCFI-2014, NOM-001-SCFI-1993 |
| ENVIRONMENTAL STANDARDS | ROHS |
| Código | |
| 32194255 | |

