




- Multi-MOV Technology
- UL1449 Type 1 LISTED
- 75kA Surge Current Rating per module
- Visual fault indicator and remote contacts
- 10-Year warranty



Electrical Characteristics		
POWER SPD TYPE		UL1449 TYPE 1 LISTED
VOLTS	[V]	415/240
AC/DC/DC PV/RF		AC
PHASE	(PH)	3Y
AMPS	[A]	n/a
AMBIENT MIN	[C]	-35
AMBIENT MAX	[C]	+85
MODES		L-L, L-N, L-G, N-G
VPR	[V]	1800/1000/1200/1200
MCOV	[V]	640/320/320/255
IN(15 impulses 8/20µs)	[kA]	20
SCCR	[kA]	200
IMAX(8/20µs)	[kA]	75
Mechanical Characteristics		
Weight		0.513 kg
TECHNOLOGY		Multi-MOV+GSG
NETWORK CONFIGURATION		3PH, 4W+G, Wye
CONNECTION METHOD		Screw Terminal (8-12AWG)
MOUNTING		DIN RAIL
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
FAIL-SAFE BEHAVIOR		Disconnection via fuse-link
REAL-TIME DIAGNOSTICS		Visual indicator and remote contacts
DIMENSIONS		See diagram [mm]
Standards		
UL STANDARD		UL1449 4th Edition
UL CATEGORY		VZCA, VZCA7
UL FILE NUMBER		E326289
STANDARDS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS		ROHS
Part number		
321934552		

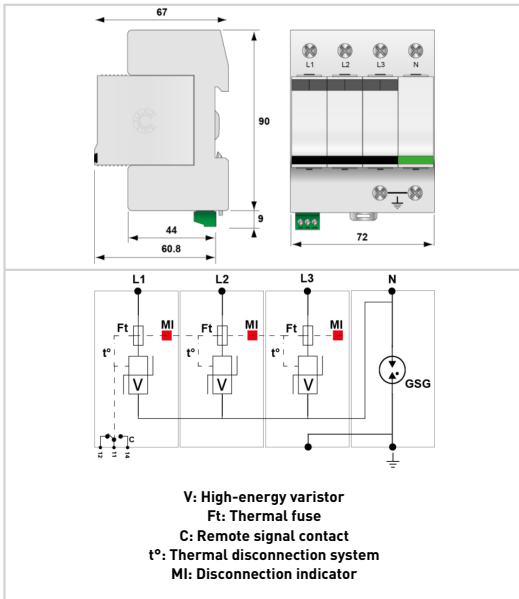