




CITEL MLPC1-440LY-R



Electrical Characteristics		
SPD type (following IEC tests)		2+3
Max. load current	IL	10 A
Max. discharge current(max. withstand @ 8/20 μs by pole)	I _{max}	10 kA
Total Maximum discharge current (max. total withstand @ 8/20 μs)	I _{max} Total	20 kA
Mechanical Characteristics		
Technology		MOV
Connection to Network		2 spring terminals opposite side in/out - wire 2.5 mm ² max.
Mounting		On plate
Housing material		Thermoplastic UL94 V-0
Operating temperature	T _u	-40/+85°C
Protection rating		IP20
Dimensions		See diagram
Standards		
Standards compliance		EN 61643-11 / IEC 61643-11
Part number		
831431		

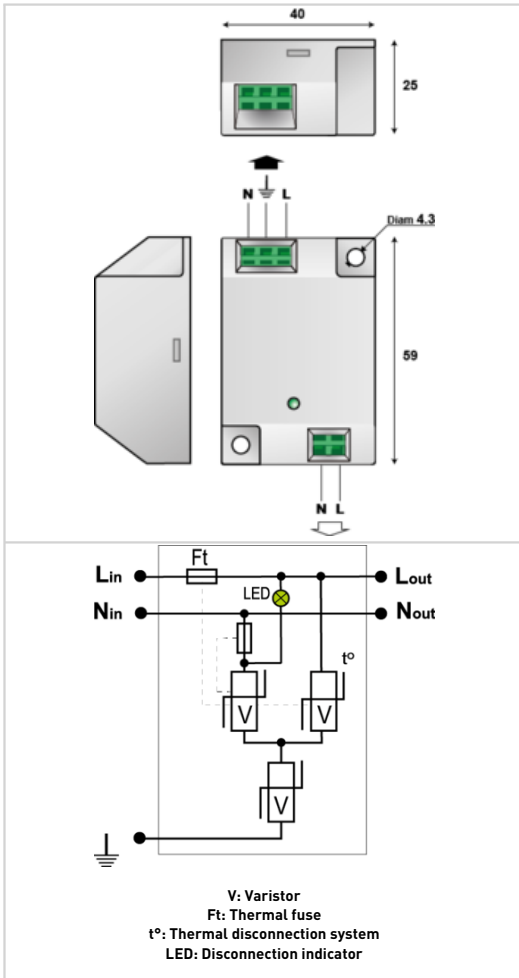