




- 1 Pair Protection
- Modes of Protection L-L,L-G
- Conduit Mounting-1/2 inch NPT
- Direct Transducer Mount
- Parallel or Series Connection Options

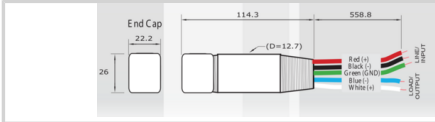

Electrical Characteristics			
VOLTS	(V)	24	
MAXIMUM LINE VOLTAGE	(V)	32	
WIRES		4W+GROUND	
LINE CURRENT MAX	(A)	0.3	
AMBIENT MIN	(C)	-55	
AMBIENT MAX	(C)	+85	
PROTECTION LEVEL	(V)	38	
IN	(kA)	10	
		15 impulses 8/20 μ s	
IMAX	(kA)	15	
		8/20 μ s	
Installation			
Operating Relative Humidity $_{Max}$	%RH	Can be submerged	
Operating Altitude $_{Min}$	Ft	2000.0000	
Operating Altitude $_{Max}$	Ft	6500.0000	
Housing/Enclosure material		Stainless Steel	
Mounting		Conduit-1/2" NPT	
Installation Location		Indoor / outdoor	
Product Dimension L	mm	114.3000	
Product Dimension H	mm	26.0000	
Product Dimension W	mm	27.9400	
Product Dimension L	In	4.5000	
Product Dimension H	In	1.0000	
Product Dimension W	In	1.1000	
Product Weight	lbs	0.8000	
Miscellaneous			
Individual Pack		Yes	
Mechanical Characteristics			
CONNECTION METHOD		Parallel- #16 AWG Copper Wires-Tinned	
Part number			
6336			