




- 1 Pair Protection
- Modes of Protection L-L, L-G
- Conduit Mounting
- Direct Transducer Mount
- Parallel or Series Connection Options

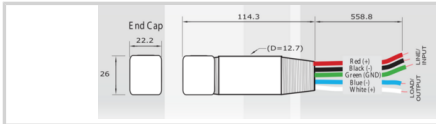

| Electrical Characteristics | | |
|-----------------------------------|------|------------------|
| VOLTS | (V) | 24 |
| WIRES | | 4W+GROUND |
| LINE CURRENT MAX | (A) | 0.3 |
| AMBIENT MIN | (C) | -55 |
| AMBIENT MAX | (C) | +85 |
| IN15 impulses 8/20µs | (kA) | 10 |
| IMAX8/20µs | (kA) | 15 |
| label.propertyGroup.INSTALLATION | | |
| Operating Relative HumidityMax | %RH | Can be submerged |
| Operating AltitudeMin | Ft | 2000.0000 |
| Operating AltitudeMax | Ft | 6500.0000 |
| Housing/Enclosure material | | Stainless Steel |
| Mounting | | Side mount |
| Installation Location | | Indoor / outdoor |
| Product DimensionL | mm | 114.3000 |
| Product DimensionH | mm | 26.0000 |
| Product DimensionW | mm | 27.9400 |
| Product DimensionL | In | 4.5000 |
| Product DimensionH | In | 1.0000 |
| Product DimensionW | In | 1.1000 |
| Product Weight | lbs | 0.8000 |
| label.propertyGroup.MISCELLANEOUS | | |
| Individual Pack | | Yes |
| Part number | | |
| 6336 | | |