




# UL TYPE 1 SPD - I<sub>max</sub> 40kA - I<sub>n</sub> 20kA - Modular

# CITEL

## DS44S-400



- ▶ UL1449 TYPE 1 LISTED SPD
- ▶ MOV Technology
- ▶ 40kA Surge Current Rating
- ▶ Visual fault indicator and remote contacts
- ▶ 10-Year warranty

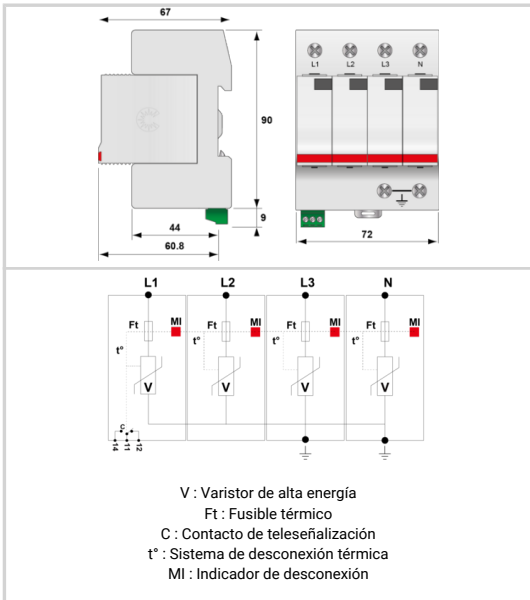

Características eléctricas	
Red	230/400 V Trifásica + N
Modo(s) de protección	Modo común
POWER SPD TYPE	UL1449 TYPE 1 LISTED
TENSION (V)	480/277
AC/DC/DC PV/RF	AC
FASE (PH)	3Y
AMPS (A)	N/A
AMBIENT MIN (C)	-35
AMBIENT MAX (C)	+60
MODOS	L-L, L-N, L-G, N-G
VPR (V)	2500/1500/1500/1500
MCOV (V)	680/420/420/420
IN (kA)	20
I <sub>cc</sub> cortocircuito (kA)	100
IMAX (kA)	40
I <sub>imp</sub> (kA)	4
Características mecánicas	
Conexión a la red	Por terminales de tornillos: 2.5-25 mm <sup>2</sup> / por bus
Formato	Caja modular desenchufable
Modo de fallo	Desconexión de la red Baja Tensión
TECNOLOGIA	MOV
CONFIGURACION DE RED	3PH, 4W+G, Wye
FORMA DE CONEXION	SPD-Screw Terminal (8-12AWG), Terminal blocks 6AWG
MONTAJE	Din Rail
MATERIAL	Thermoplastic UL94-V0
NEMA RATING (IP RATING)	NEMA 2 (IP20)
DESCONEXION SEGURA	Disconnection via fuse-link
REAL-TIME DIAGNOSTICS	Visual indicator and remote contacts
DIMENSIONS	See diagram
WEIGHT	1.20 lbs
SPARE PART	DMS40-400
Normas	
Certificación	UL / CSA / TUV Süd
UL STANDARD	UL1449 5th Edition
UL CATEGORY	VZCA, VZCA7
UL FILE NUMBER	E326289
NORMAS	NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS	ROHS
Código	
461422	

