





UL TYPE 1 SPD - I_{max} 40kA - I_n 20kA - Module

CITEL

DS44S-480

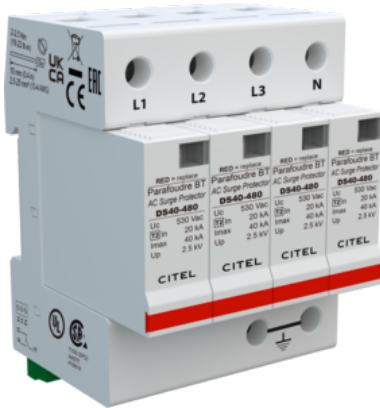

- ↳ UL1449 TYPE 1 LISTED SPD
- ↳ MOV Technology
- ↳ 40kA Surge Current Rating
- ↳ Visual fault indicator and remote contacts
- ↳ 10-Year warranty

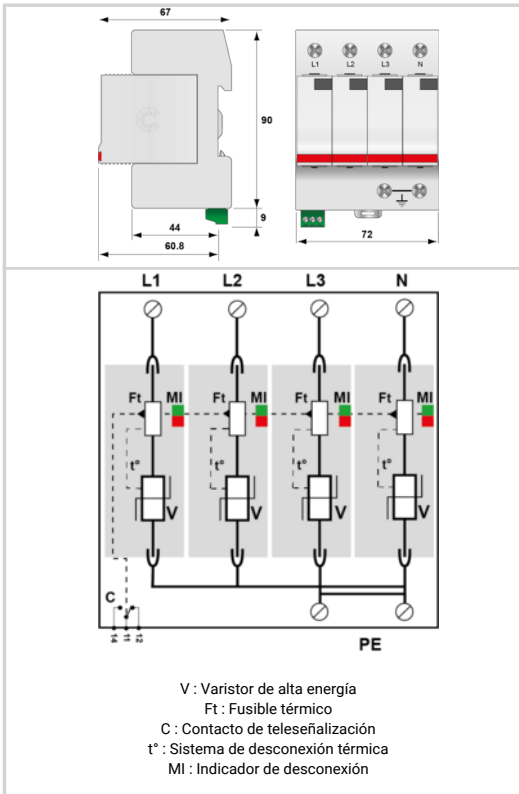

Características eléctricas	
Red	277/480 V Trifásica+N
Modo(s) de protección	Modo común
POWER SPD TYPE	UL1449 TYPE 1 LISTED
TENSION	(V) 480
AC/DC/DC PV/RF	AC
FASE	(PH) 3D
AMPS	(A) N/A
AMBIENT MIN	(C) -35
AMBIENT MAX	(C) +60
MODOS	L-L, L-G
VPR	(V) 4000/4000/1800/1800
MCOV	(V) 550-/550/-
IN	(kA) 20
I _{cc} cortocircuito	(kA) 100
IMAX	(kA) 40
I _{imp}	(kA) 4

Características mecánicas	
Conexión a la red	Por terminales de tornillos: 2.5-25 mm ² / por bus
Formato	Caja modular desenchufable
Modo de fallo	Desconexión de la red Baja Tensión
Peso	0.405 kg
TECNOLOGIA	MOV
CONFIGURACION DE RED	3PH, 3W+G, Delta
FORMA DE CONEXION	Screw Terminal, 13-2AWG Solid Wire, 13-4AWG Stranded Wire
MONTAJE	Wall mount
MATERIAL	Thermoplastic UL94-V0
NEMA RATING (IP RATING)	NEMA 2 (IP20)
DESCONEXION SEGURA	Disconnection via fuse-link
REAL-TIME DIAGNOSTICS	Visual indicator and remote contacts
DIMENSIONS	See diagram
WEIGHT	0.90 lbs
SPARE PART	DSM40-480

Normas	
Certificación	UL
UL STANDARD	UL1449 5th Edition
UL CATEGORY	VZCA, VZCA7
UL FILE NUMBER	E326289
NORMAS	NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS	ROHS

Código	
33101421	

