





CITEL

B180-24D3



- ↳ Hybrid SAD-GDT Technology
- ↳ UL497B LISTED
- ↳ 20kA I_{max}
- ↳ 5kA I_{mp}
- ↳ 5kA I_n

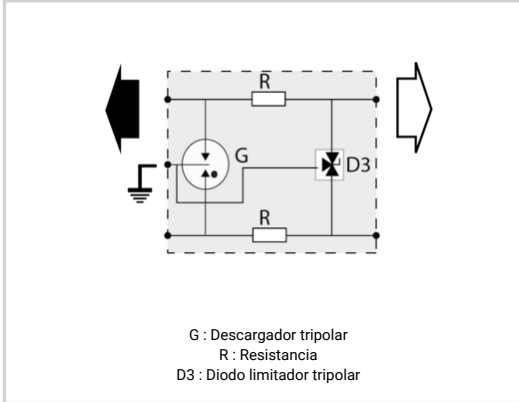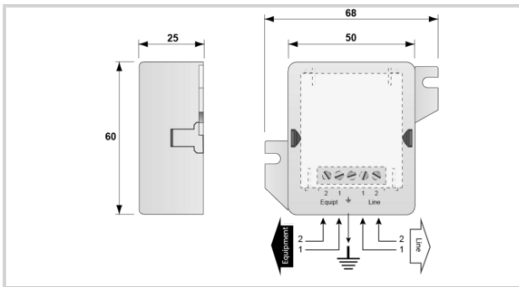

Características eléctricas

| | | |
|------------------------------|--------|--------------------------------|
| Red | | LS, 4-20 mA |
| Tensión DC máx. de operación | Uc | 28 Vdc |
| Frecuencia máx. | f max. | > 3 MHz |
| Perdida de inserción | | < 1 dB |
| Modo(s) de protección | | Modo Común o Mode Diferenciado |
| DATA SPD TYPE | | UL497B LISTED |
| TENSION | (V) | 24 |
| WIRES | | 2W+GROUND |
| LINE CURRENT MAX | (A) | 0.3 |
| AMBIENT MIN | (C) | -50 |
| AMBIENT MAX | (C) | +85 |
| RESIDUAL VOLTAGE | (V) | 40 |
| MCOV | (V) | 28/ |
| IN | (kA) | 5 |
| IMAX | (kA) | 20 |
| I _{imp} | (kA) | 5 |
| DATA SPEED | (Mbps) | up to 10MHz |

Características mecánicas

| | | |
|-------------------------|--|--|
| Tecnología | | GDT+Diodo limitador |
| Conexión a la red | | Por tornillos : sección mini/máxi 0.4-1.5 mm ² |
| Formato | | Caja de pared |
| Modo de fallo | | Corto-circuito - interrupción de transmisión - modo de falla 2 |
| TECNOLOGIA | | SAD-GDT |
| CONFIGURACION DE RED | | 2W+G |
| FORMA DE CONEXION | | RJ11 Connector |
| MONTAJE | | Wall mount |
| MATERIAL | | Thermoplastic UL94-V0 |
| NEMA RATING (IP RATING) | | NEMA 2 (IP20) |
| DIMENSIONS | | See diagram |
| WEIGHT | | 0.30 lbs |
| SPARE PART | | n/a |

Normas

| | | |
|-------------------------|--|--|
| Certificación | | UL 497B |
| UL STANDARD | | UL497B |
| UL CATEGORY | | QVGQ |
| UL FILE NUMBER | | E184939 |
| NORMAS | | IEC 61643-11, NOM-003-SCFI-2014, NOM-001-SCFI-1993 |
| ENVIRONMENTAL STANDARDS | | ROHS |

Código

510302

