




# CITEL

## DS60VGPV-1000



- ↳ UL Type 1 CA DC SPD for PV Systems
- VG Technology for Maximum Performance
- Zero Leakage Current
- Zero Current Working
- I<sub>max</sub> : 40kA/pole at 8/20µs
- I<sub>n</sub> : IEC 20kA/pole, UL 10kA/pole at 8/20µs
- UL 1449 4th Edition Recognized

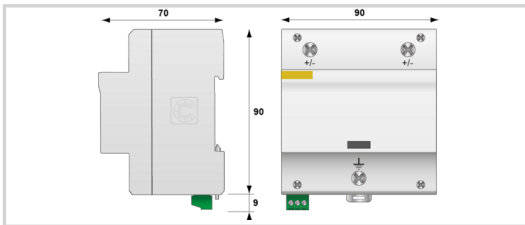

Características eléctricas		
Nivel de protección +/-PE (-/PE) @ I <sub>n</sub> (8/20µs)	Up	2.8 kV
Voltage Protection Level	V	4000.0000
Voltage Protection Level	V	3000.0000
Voltage Protection Level	V	3000.0000
Características mecánicas		
Tecnología	Tecnología VG (MOV+GSG)	
Conexión a la red	Por terminales de tornillos 4-25 mm <sup>2</sup>	
Peso	0.565 kg	
Normas		
Certificación	UL	
Código		
3947		

