





CITEL DS44US-480D



- MOV Technology
- UL1449 Type 4CA
- 40kA Surge Current Rating
- Visual fault indicator and remote contacts
- 10-Year warranty

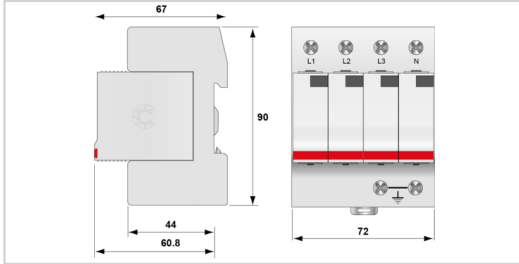

Electrical Characteristics		
POWER SPD TYPE		UL1449 TYPE 1 LISTED
VOLTS	[V]	480
AC/DC/DC PV/RF		AC
PHASE	[PH]	3D
AMPS	[A]	n/a
AMBIENT MIN	[C]	-35
AMBIENT MAX	[C]	+60
MODES		L-L, L-G
VPR	[V]	1800/-/1800/-
MCOV	[V]	550/-/550/-
IN(15 impulses 8/20µs)	[kA]	20
SCCR	[kA]	100
IMAX(8/20µs)	[kA]	40
Mechanical Characteristics		
Weight		0.441 kg
TECHNOLOGY		MOV
NETWORK CONFIGURATION		3PH, 3W+G, Delta
CONNECTION METHOD		Screw Terminal (8-12AWG)
MOUNTING		DIN RAIL
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
FAIL-SAFE BEHAVIOR		Disconnection via fuse-link
REAL-TIME DIAGNOSTICS		Visual indicator and remote contacts
DIMENSIONS		See diagram (mm)
WEIGHT		1.20 lbs
SPARE PART		DSM40-480
Standards		
UL STANDARD		UL1449 4th Edition
UL CATEGORY		VZCA, VZCA7
UL FILE NUMBER		E326289
STANDARDS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS		ROHS
Part number		
33171455		

