




CITEL MLPC2-230L-V/ESP2

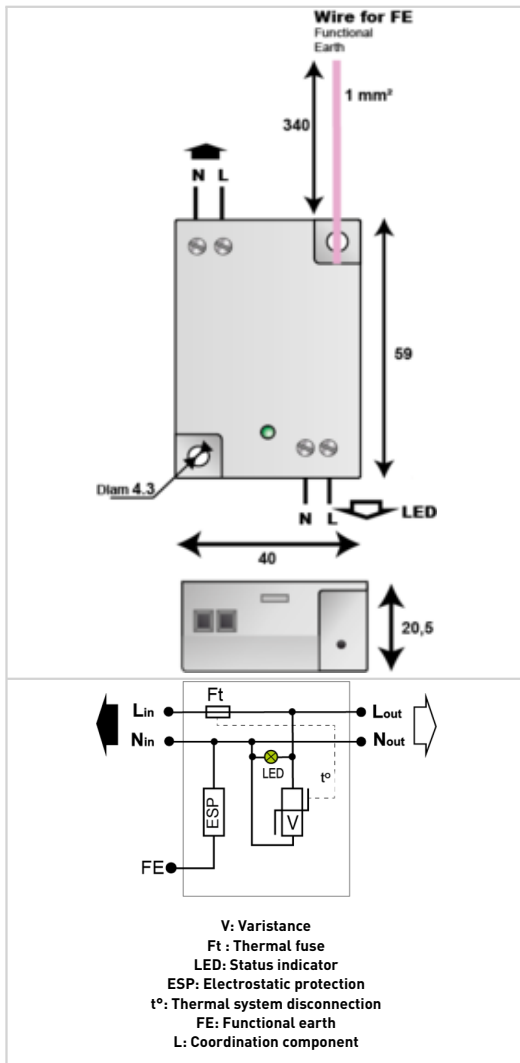

EAC

**Electrical Characteristics**

SPD type (following IEC tests)		2+3
Max. load current	IL	5 A
Max. discharge current(max. withstand @ 8/20 μs by pole)	I _{max}	10 kA
Total Maximum discharge current (max. total withstand @ 8/20 μs)	I _{max} Total	20 kA
Protection level (@ In @ 8/20μs)	Up	1.5 kV

Mechanical Characteristics

Connection to Network		2 screw terminals opposite side in/out - wire 2.5 mm ² max.
Mounting		On plate
Housing material		Thermoplastic UL94 V-0
Operating temperature	T _u	-40/+85°C
Protection rating		IP20
Dimensions		See diagram
Weight		0.042 kg

Standards

Standards compliance		EN 61643-11 / IEC 61643-11
Certification		EAC

Part number

832227

