




- ▶ MOV Technology
- ▶ UL1449 Type 4CA
- ▶ 50kA Surge Current Rating
- ▶ Visual fault indicator and remote contacts
- ▶ 10-Year warranty



Electrical Characteristics	
Network	230/400 V 3-phase
POWER SPD TYPE	UL1449 5th Ed. TYPE 4CA
VOLTS	(V) 230
AC/DC/DC PV/RF	AC
PHASE	(PH) 1
AMPS	(A) N/A
AMBIENT MIN	(C) -40
AMBIENT MAX	(C) +85
MODES	L-N
MLV	(V) 2020
MCOV	(V) 275
IN	(kA) 20
15 impulses 8/20 $\mu$ s	
SCCR	(kA) n/a
IMAX	(kA) 40
8/20 $\mu$ s	
Mechanical Characteristics	
Technology	MOV
Connection to Network	By screw terminals: 2.5-25mm <sup>2</sup> (35mm <sup>2</sup> rigid)
Format	Plug-in modular box
Failsafe mode	Disconnection from AC network
TECHNOLOGY	MOV
NETWORK CONFIGURATION	1 Pole, 1W+G, 1PH
CONNECTION METHOD	SPD-Screw Terminal (8-12AWG), Terminal blocks 6AWG
MOUNTING	Wall mount
MATERIAL	Thermoplastic UL94-V0
NEMA RATING (IP RATING)	NEMA 2 (IP20)
FAIL-SAFE BEHAVIOR	Disconnection via fuse-link
REAL-TIME DIAGNOSTICS	Visual indicator and remote contacts
DIMENSIONS	See diagram
WEIGHT	0.22 lbs
Standards	
Certification	ÖVE / UL
UL STANDARD	UL1449 5th Edition
UL CATEGORY	VZCA2
UL FILE NUMBER	E326289
STANDARDS	NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS	ROHS
Part number	
<b>821110211</b>	

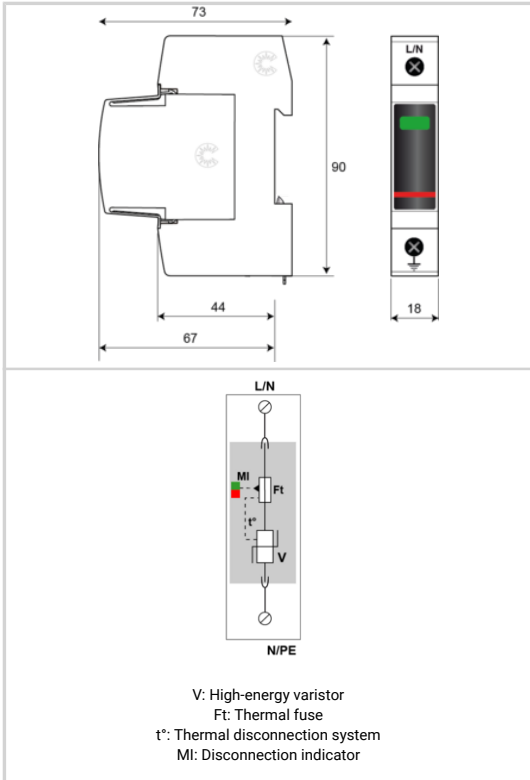