




- Hybrid SAD-GDT Technology
- UL497B LISTED
- 20kA I<sub>max</sub> (1x 8/20us)
- 5kA I<sub>mp</sub> (2x 10/350us)
- 5kA I<sub>n</sub> (10x 8/20us)
- Modular
- 2W+SHIELD+G



Electrical Characteristics			
Max. DC operating voltage	U <sub>c</sub>		28 Vdc
Insertion loss			< 1 dB
Max. load current @25°C	I <sub>L</sub>		300 mA
Impulse current 2 x 10/350µs Test - D1 Category	I <sub>imp</sub>		5 kA
Nominal Discharge Current, X-C (Line/Earth) 8/20µs Test x 10 - C2 Category	I <sub>n</sub> L/PE		5 kA
DATA SPD TYPE			UL497B LISTED
VOLTS	(V)		24
WIRES			2W+SHIELD+G
LINE CURRENT MAX	(A)		0.3
AMBIENT MIN	(C)		-50
AMBIENT MAX	(C)		+85
RESIDUAL VOLTAGE	(V)		40
MCOV	(V)		28
IN 10 impulses 8/20µs	(kA)		5
IMAX 8/20µs	(kA)		20
I <sub>imp</sub> 10/350µs	(kA)		5
DATA SPEED	(Mbps)		10/100
INSERTION LOSS (@ FREQ)	(db)		< 1
Mechanical Characteristics			
Connection to Network			By screw terminal: cross section 0.5-2.5mm <sup>2</sup>
With line cut-off in case of removal plug-in module			Yes
TECHNOLOGY			SAD-GDT
NETWORK CONFIGURATION			1 pair
CONNECTION METHOD			Screw Terminal
DISCONNECTION			Line disconnect with module removal
MOUNTING			DIN RAIL
MATERIAL			Thermoplastic UL94-V0
NEMA RATING (IP RATING)			NEMA 2 (IP20)
DIMENSIONS			See diagram
WEIGHT			0.30 lbs
SPARE PART			DLAWM-24D3
Standards			
UL STANDARD			UL497B
UL CATEGORY			QVGQ
UL FILE NUMBER			E184939
STANDARDS			IEC 61643-11, NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS			ROHS
Part number			
640803			

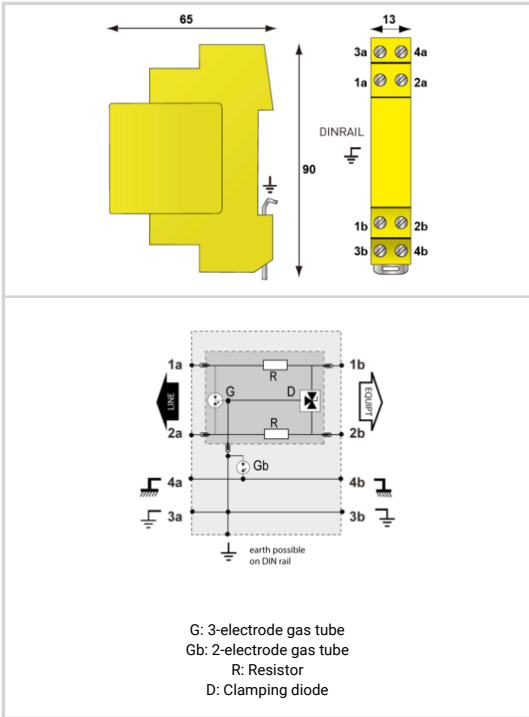