





UL121201 Hazardous Locations- I_{max} 40kA - In 20kA - Modular

CITEL

DS44S-400/G



- ↳ MOV Technology
- ↳ UL1449 Type 4CA
- ↳ 40kA Surge Current Rating
- ↳ Visual fault indicator and remote contacts
- ↳ 10-Year warranty

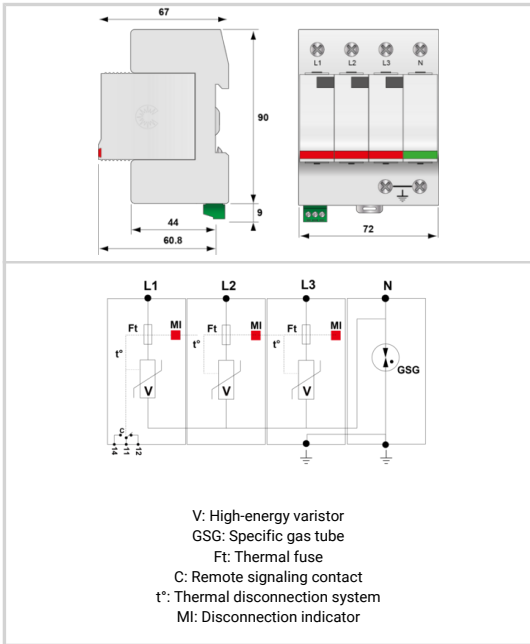

Electrical Characteristics	
Network	230/400 V 3-phase+N
Total Maximum discharge current <i>max. total withstand @ 8/20 μs</i>	I _{max} Total 40 kA
Protection mode(s)	Common/Differential mode
POWER SPD TYPE	UL1449 5th Ed. TYPE 4CA
VOLTS	(V) 480/277
AC/DC/DC PV/RF	AC
PHASE	(PH) 3Y
AMPS	(A) N/A
AMBIENT MIN	(C) -35
AMBIENT MAX	(C) +60
MODES	L-L, L-N, L-G, N-G
MLV	(V) 3890/2550/2780/1140
MCOV	(V) 680/420/420/255
IN 15 impulses 8/20 μs	(kA) 20
SCCR	(kA) n/a
IMAX 8/20 μs	(kA) 40

Mechanical Characteristics	
Technology	MOV+GDT
Connection to Network	By screw terminals: 2.5-25mm ² / by bus
Format	Plug-in modular box
Failsafe mode	Disconnection from AC network
Weight	0.331 kg
TECHNOLOGY	MOV+GSG
NETWORK CONFIGURATION	3PH, 4W+G, Wye
CONNECTION METHOD	SPD-Screw Terminal (8-12AWG), Terminal blocks 6AWG
MOUNTING	Din Rail
MATERIAL	Thermoplastic UL94-V0
NEMA RATING (IP RATING)	NEMA 2 (IP20)
FAIL-SAFE BEHAVIOR	Disconnection via fuse-link
REAL-TIME DIAGNOSTICS	Visual indicator and remote contacts
DIMENSIONS	See diagram
WEIGHT	1.20 lbs
SPARE PART	DSM40-400, DSM40G-600

Standards	
Certification	CSA / UL Listed
UL STANDARD	UL1449 5th Edition
UL CATEGORY	VZCA, VZCA7
UL FILE NUMBER	E326289
STANDARDS	NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS	ROHS

Part number
461432

