






# CITEL

## DS50VGPVS-1000G/51

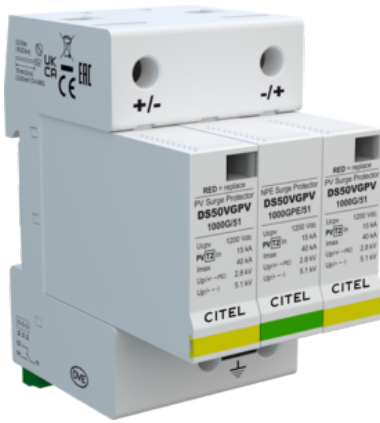

V: High-energy varistor  
 GSG: Specific gas tube  
 Ft: Thermal fuse  
 C: Remote signaling contact  
 t\*: Thermal disconnection system  
 MI: Disconnection indicator

| Electrical Characteristics   |                           |   |
|--|---------------------------|---|
| Total Maximum discharge current<br><i>max. total withstand @ 8/20 μs</i> | I <sub>max</sub><br>Total | 60 kA                                     |
| Protection mode(s)   |                           | Common/Differential mode                  |
| Protection level +/-PE (-/PE)<br><i>@ I<sub>n</sub> (8/20μs)</i>         | U <sub>p</sub>            | 2.8 kV                                    |
| Mechanical Characteristics   |                           |   |
| Connection to Network  |                           | By screw terminals: 2.5-25mm <sup>2</sup> |
| Weight   |                           | 0.306 kg                                  |
| MOUNTING   |                           | Din Rail                                  |
| Part number  |                           |   |
| 481311   |                           |   |

