



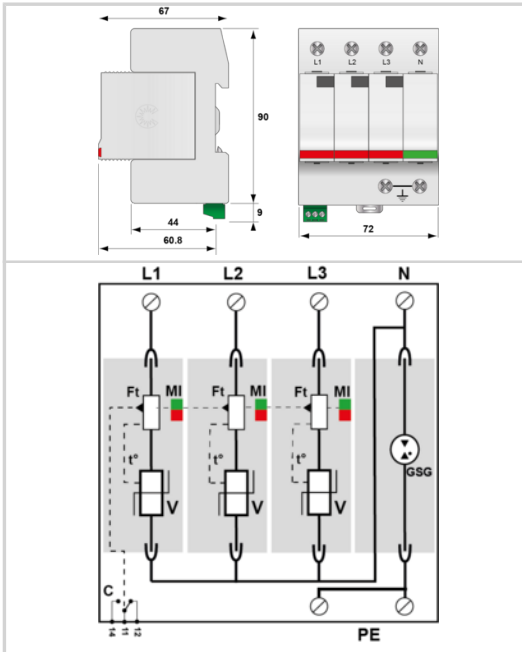

CITEL

DS44S-320/G

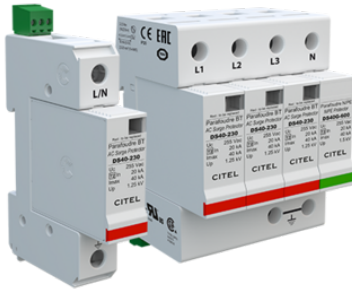

| Electrical Characteristics | |
|----------------------------|--|
| POWER SPD TYPE | UL1449 5th Ed. TYPE 4CA |
| AC/DC/DC PV/RF | AC |
| AMPS | (A) N/A |
| AMBIENT MIN | (C) -35 |
| AMBIENT MAX | (C) +60 |
| IN | (kA) 20 |
| 15 impulses 8/20µs | |
| SCCR | (kA) n/a |
| IMAX | (kA) 40 |
| 8/20µs | |
| limp | (kA) 4 |
| 10/350µs | |
| Mechanical Characteristics | |
| CONNECTION METHOD | SPD-Screw Terminal (8-12AWG), Terminal blocks 6AWG |
| MOUNTING | Din Rail |
| MATERIAL | Thermoplastic UL94-V0 |
| NEMA RATING (IP RATING) | NEMA 2 (IP20) |
| FAIL-SAFE BEHAVIOR | Disconnection via fuse-link |
| REAL-TIME DIAGNOSTICS | Visual indicator and remote contacts |
| DIMENSIONS | See diagram |
| Standards | |
| Certification | CSA / UL Listed |
| UL STANDARD | UL1449 5th Edition |
| UL CATEGORY | VZCA2, VZCA8 |
| UL FILE NUMBER | E326289 |
| STANDARDS | NOM-003-SCFI-2014, NOM-001-SCFI-1993 |
| ENVIRONMENTAL STANDARDS | ROHS |
| Part number | |
| 3916 | |

