





- Telephone Lines
- Hybrid GDT and Diode Technology
- RJ11 connector
- Bi-Directional Protection
- Shielded Connector Configurations
- DIN Rail, Screw Lug, and Flange Mounting

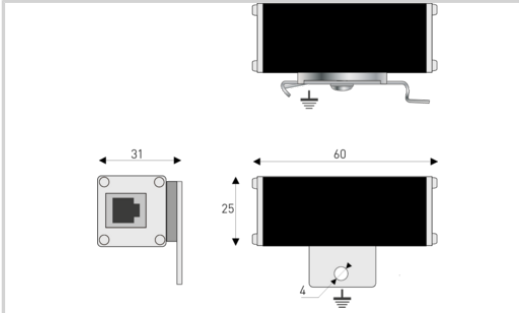

Características eléctricas			
Tensión DC máx. de operación	Uc	170 Vdc	
Corriente de descarga nominal X-C (Línea/Tierra) <i>Prueba 8/20µs x 10 - categoría C2</i>	In L/PE	2500 A	
DATA SPD TYPE		UL497B LISTED	
TENSION	(V)	150	
AMBIENT MIN	(C)	-50	
AMBIENT MAX	(C)	+85	
RESIDUAL VOLTAGE	(V)	210	
IN	(kA)	2.5	
IMAX	(kA)	10	
FREQUENCY	(MHz)	up to 10	
MAX. LINE VOLTAGE	(Vdc)	170	

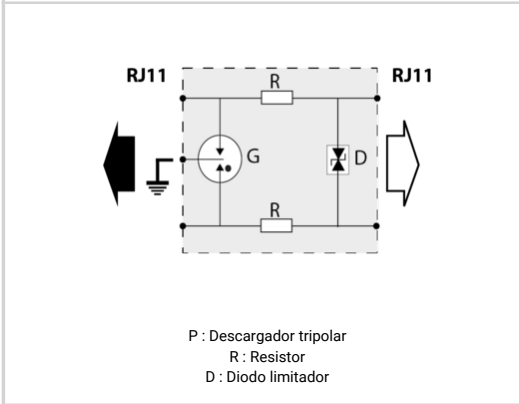

Características mecánicas	
Conexión a la red	Conector RJ11 Hembra entrada/salida
TECNOLOGIA	SAD-GDT
CONFIGURACION DE RED	1 pair
FORMA DE CONEXION	RJ11 Connector
MONTAJE	Wall mount
MATERIAL	Thermoplastic UL94-V0
NEMA RATING (IP RATING)	NEMA 2 (IP20)
DIMENSIONS	See diagram
WEIGHT	0.30 lbs

Normas	
UL STANDARD	UL497B
UL CATEGORY	QVGQ
UL FILE NUMBER	E184939
NORMAS	IEC 61643-11, NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS	ROHS

Código	
560422	

