


## M50-480D-A



- Hybrid MOV-GSG Technology
- UL1449 Type 1 LISTED
- 50kA Surge Current Rating per mode
- Extended life with no leakage current
- Visual LED fault indicator and audible alarm
- NEMA 6 (exceeds NEMA 4X or 4)
- Optional Type 2 LISTED with UL1283 Filter
- 10-Year warranty

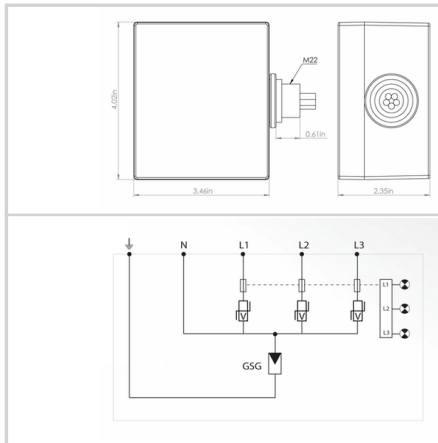

| Características eléctricas    |      |                                                   |
|-------------------------------|------|---------------------------------------------------|
| POWER SPD TYPE                |      | UL1449 TYPE 1 LISTED                              |
| TENSION                       | (V)  | 480                                               |
| AC/DC/DC PV/RF                |      | AC                                                |
| FASE                          | (PH) | 3D                                                |
| AMPS                          | (A)  | N/A                                               |
| AMBIENT MIN                   | (C)  | -35                                               |
| AMBIENT MAX                   | (C)  | +80                                               |
| MODOS                         |      | L-L, L-G                                          |
| VPR                           | (V)  | 2500/-/1500/-                                     |
| MCOV                          | (V)  | 560/560/-/-                                       |
| IN                            | (kA) | 20                                                |
| I <sub>cc</sub> cortocircuito | (kA) | 150                                               |
| IMAX                          | (kA) | 50                                                |
| Características mecánicas     |      |                                                   |
| Peso                          |      | 1.082 kg                                          |
| TECNOLOGIA                    |      | MOV-GSG                                           |
| CONFIGURACION DE RED          |      | 3PH, 3W+G, Delta                                  |
| FORMA DE CONEXION             |      | 36" #12 AWG LEADS                                 |
| MONTAJE                       |      | SIDE MOUNT, THREADED M22 (1/4" NPT ADAPTER)       |
| MATERIAL                      |      | Aluminum cast                                     |
| NEMA RATING (IP RATING)       |      | 6 (IP66)                                          |
| DESCONEXION SEGURA            |      | Yes, no upstream over current protection required |
| REAL-TIME DIAGNOSTICS         |      | LED and audible alarm                             |
| DIMENSIONS                    |      | See diagram                                       |
| WEIGHT                        |      | 2.5 lbs.                                          |
| Normas                        |      |                                                   |
| UL STANDARD                   |      | UL1449 5th Edition                                |
| UL CATEGORY                   |      | VZCA                                              |
| UL FILE NUMBER                |      | E326289                                           |
| NORMAS                        |      | NOM-003-SCFI-2014, NOM-001-SCFI-1993              |
| ENVIRONMENTAL STANDARDS       |      | ROHS                                              |
| Código                        |      |                                                   |
| 89751704                      |      |                                                   |