




DATA LINE SPD - UL497B - I_{max} 1kA - I_n 1kA

CITEL

DD9-24V



- Data Line Surge Protector for RS Networks • 9, 15 and 25-Pin D-Sub Connectors • Supports Data Rates Up to 40Mbps • Fast and Easy Installation • Ideal for Equipment Level Protection • UL497B Listed

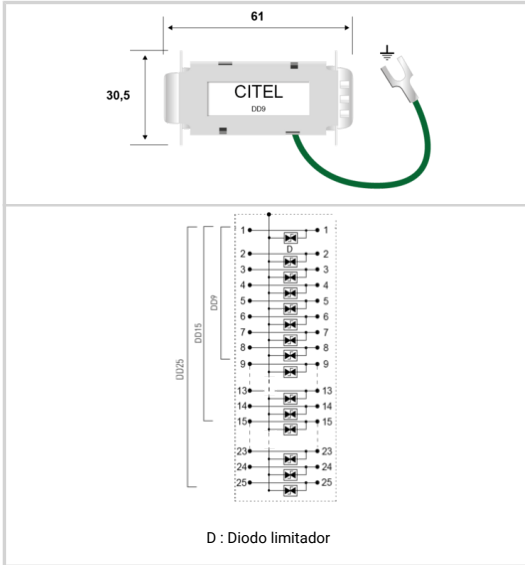

Características eléctricas		
Red		RS232, RS485, 4-20mA
Tensión DC máx. de operación	Uc	40 Vdc
Frecuencia máx.	f max.	> 10 MHz
Velocidad máx.		< 40 Mbps
Perdida de inserción		< 1 dB
Corriente máx. De línea @25°C	IL	750 mA
Corriente de descarga máxima total	I _{max} Total	1125 A
Capacidad máx. total en onda 8/20µs		
Modo(s) de protección		Modo Común
Nivel de protección		
Categoría C3 (10/1000µs), 300 aplicaciones@10 A, X-X (Línea/Línea)	Up	130 V
Nivel de protección		
Categoría C3 (10/1000µs), 300 aplicaciones@10 A, X-C (Línea/Tierra)	Up	65 V
Corriente de descarga nominal		
Categoría C2 (8/20µs), 10 aplicaciones, X-X (Línea/Línea)	In	125 A
Corriente de descarga nominal		
Categoría C2 (8/20µs), 10 aplicaciones, X-C (Línea/Tierra)	In	125 A
Capacidad @1MHz, X-C (Línea/Tierra)	C	< 500 pF
DATA SPD TYPE		UL497B LISTED
TENSION	(V)	24
WIRES		9W+GROUND
AMBIENT MIN	(C)	-50
AMBIENT MAX	(C)	+85
RESIDUAL VOLTAGE	(V)	20
IMAX	(kA)	1
Iimp	(kA)	-
DATA SPEED	(Mbps)	up to 10MHz
Instalación		
Operating Temperature	°C	85.0000
Operating Temperature	°F	-40.0000
Operating Relative Humidity	%RH	95
Housing/Enclosure material		Thermoplastic
Flammability rating		V0
Mounting		D-Sub connector
IP Environmental rating		IP20
Installation Location		Indoor
Accesorio		Soporte 'L' de acero inoxidable
Product Dimension	mm	61.0000
Product Dimension	mm	30.5000
Product Dimension	In	2.4000
Product Dimension	In	1.2000
Miscelánea		
Individual Pack		Yes
Storage Temperature	°C	85.0000
Storage Temperature	°F	-40.0000
Storage Relative Humidity	%RH	95.0000
Instalación		
Cable type		Serial cable
Características mecánicas		
Tecnología		Diodo limitador
Conexión a la red		D Sub 9 pts Macho/Hembra en entrada/salida
Formato		D-Sub conector
Modo de fallo		Corto-circuito - interrupción de transmisión - modo de falla 2
Pin out		todos los hilos protegidos y transmitidos
Peso		0.063 kg
TECNOLOGIA		SAD
CONFIGURACION DE RED		9W+G
FORMA DE CONEXION		9-pin D-Sub connector
MONTAJE		SURFACE MOUNT

DD9-24V

MATERIAL	Thermoplastic UL94-V0
NEMA RATING (IP RATING)	NEMA 2 (IP20)
DIMENSIONS	See diagram (mm)
WEIGHT	0.30 lbs
Normas	
Certificación	UL 497B
UL STANDARD	UL497B
UL CATEGORY	QVGQ
UL FILE NUMBER	E184939
NORMAS	IEC 61643-21
ENVIRONMENTAL STANDARDS	ROHS
Código	
6147	