


MSP-VM24/RI



- Combined POE Injector and SPD
- Supports 802.3af, 802.3af, 802.3bt
- Hybrid SAD-GDT Technology
- DIN rail mount with integrated ground connection
- Power supply option

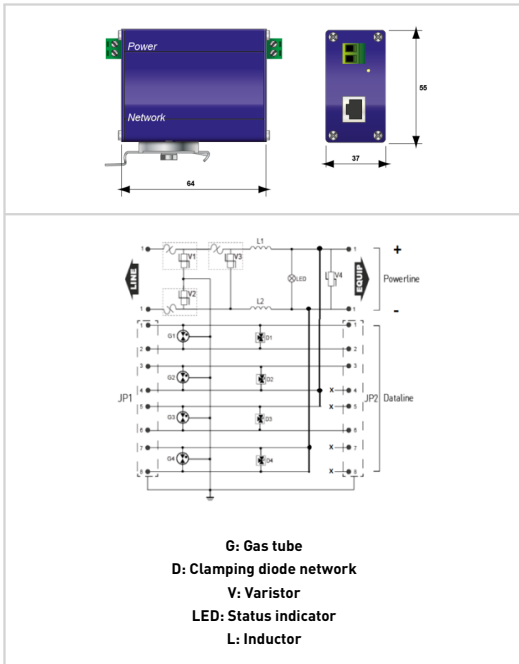

| Caractéristiques Électriques | | |
|--------------------------------|------|--|
| SPD type (following IEC tests) | | 2+3 |
| POWER SPD TYPE | | IEC Type 2 |
| VOLTS | (V) | 24/6/6 |
| AC/DC/DC PV/RF | | COMBINED SPD |
| PHASE | (PH) | - |
| AMPS | (A) | 5 |
| AMBIENT MIN | (C) | -35 |
| AMBIENT MAX | (C) | +85 |
| MODES | | DC+-DC-,DC+-G,DC--G |
| MLV DC | (V) | 580/560/490 |
| MCOV | (V) | 38/38/38 |
| IN(15 impulses 8/20µs) | (kA) | 10.0000 |
| SCCR | (kA) | n/a |
| IMAX(8/20µs) | (kA) | 20 |
| Caractéristiques Mécaniques | | |
| TECHNOLOGY | | MOV for Power and SAD-GDT for Video, Data |
| NETWORK CONFIGURATION | | 2W+G Power, BNC Video, RJ45 Ethernet |
| CONNECTION METHOD | | Screw Terminal (8-12AWG), BNC, RJ45 |
| MOUNTING | | DIN RAIL |
| MATERIAL | | Aluminum cast |
| NEMA RATING (IP RATING) | | NEMA 2 (IP20) |
| FAIL-SAFE BEHAVIOR | | Disconnection via fuse-link |
| REAL-TIME DIAGNOSTICS | | Loss of signal |
| DIMENSIONS | | See diagram |
| WEIGHT | | 0.30 lbs |
| SPARE PART | | n/a |
| Normes | | |
| UL STANDARD | | - |
| UL CATEGORY | | - |
| UL FILE NUMBER | | - |
| STANDARDS | | IEC 61643-11, IEC 61643-21, NOM-003-SCFI-2014, NOM-001-SCFI-1993 |
| ENVIRONMENTAL STANDARDS | | ROHS |
| Code article | | |
| 890192 | | |

