


- VG Technology
- for 120-277Vac LED applications
- I<sub>max</sub> 20kA, I<sub>n</sub> 10kA
- Optimized for TOV
- LED indicator option
- ANSI/IEEE C136.2 Extreme
- ANSI/IEEE C62.41 Category C
- UL Type 4CA
- 10-year Warranty



Características eléctricas		
POWER SPD TYPE		UL1449 5th Ed. TYPE 4CA
TENSION	(V)	120-277
AC/DC/DC PV/RF		AC
FASE	(PH)	1
AMPS	(A)	N/A
AMBIENT MIN	(C)	-35
AMBIENT MAX	(C)	+75
MODOS		L-L, L-G, L-N, N-G
MLV	(V)	1880/1940/1930
MCOV	(V)	305/305/305
IN	(kA)	10
I <sub>cc</sub> cortocircuito	(kA)	n/a
IMAX	(kA)	20
Características mecánicas		
TECNOLOGIA		VG (MOV+GSG)
CONFIGURACION DE RED		1PH, 2W+G, Single Phase (or 2PH, 2W+G, Two Phase)
FORMA DE CONEXION		PARALLEL VIA 8" #16 AWG LEADS
MONTAJE		FLANGE MOUNT
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 6P (IP67)
DESCONEXION SEGURA		TOV Immunity
REAL-TIME DIAGNOSTICS		LED Indicator (optional)
DIMENSIONS		See diagram
WEIGHT		0.30 lbs
SPARE PART		n/a
Normas		
Certificación		UL
UL STANDARD		UL1449 5th Edition
UL CATEGORY		VZCA2, VZCA8
UL FILE NUMBER		E326289
NORMAS		IEC 61643-11, NOM-003-SCFI-2014, NOM-001-SCFI-1993
ANSI/IEEE C62.41		Category C 20kV/10kA
ANSI/IEEE C136.2		Extreme Category 20kV/10kA
ENVIRONMENTAL STANDARDS		ROHS
Código		
89072479		

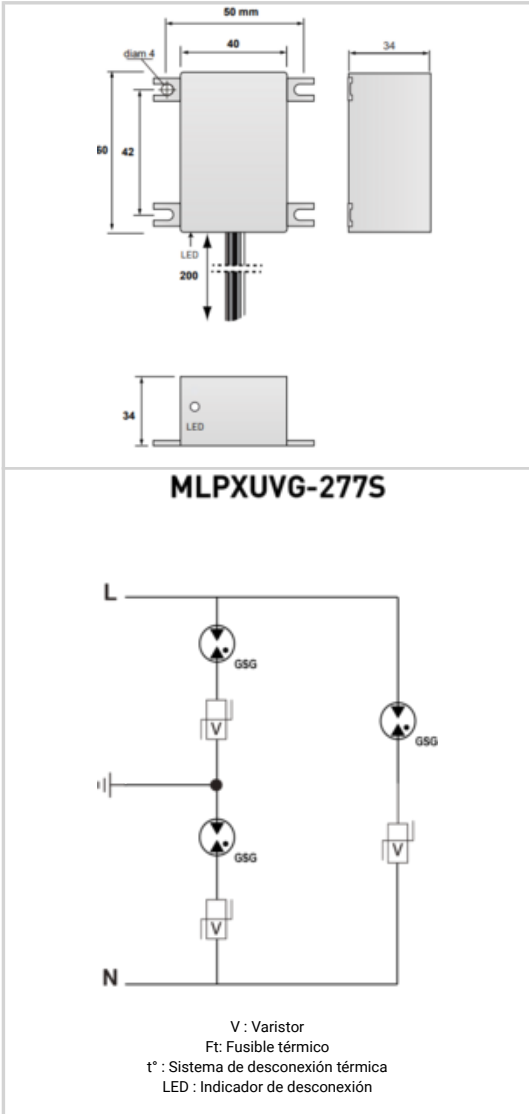