




- Protection against permanent/temporary overvoltages of AC network
- For 230 Vac AC single-phase powerline
- Load current: up to 16 A
- Automatic operation: disconnection/reconnection
- Operating indicator
- installation on DIN rail

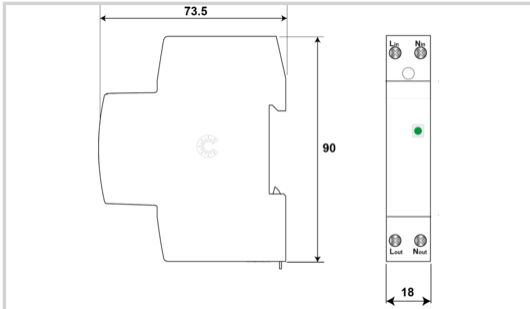

Electrical Characteristics		
PROTECTS AGAINST PERMANENT AND TEMPORARY OVERVOLTAGES		YES
VOLTS	(V)	230
PHASE	(PH)	1
MAX LOAD CURRENT	A	16
Mechanical Characteristics		
CONNECTION METHOD	By screw terminals: 1.5-10mm <sup>2</sup>	
MIN DISCONNECTION TIME DURING AC OVERVOLTAGE	3s @275VAC/1s @300VAC/0.25s @350VAC/0.07s @400VAC	
MOUNTING	DIN RAIL	
DIMENSIONS	See diagram (mm)	
Part number		

3589015

