




- Protection against permanent/temporary overvoltages of AC network
- For 230 Vac AC single-phase powerline
- Load current: up to 16 A
- Automatic operation: disconnection/reconnection
- Operating indicator
- installation on DIN rail

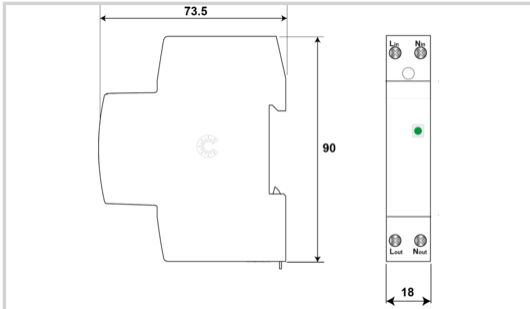

Características eléctricas		
PROTECTS AGAINST PERMANENT AND TEMPORARY OVERVOLTAGES		YES
TENSION	(V)	230
FASE	(PH)	1
MAX LOAD CURRENT	A	16
Características mecánicas		
FORMA DE CONEXION		By screw terminals: 1.5-10mm ²
MIN DISCONNECTION TIME DURING AC OVERVOLTAGE		3s @275VAC/1s @300VAC/0.25s @350VAC/0.07s @400VAC
MONTAJE		DIN RAIL
DIMENSIONS		See diagram (mm)

Código
3589015

