



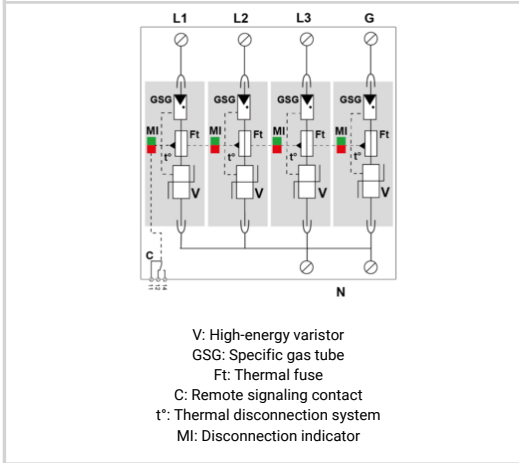

- VG Technology
- UL1449 Type 4CA
- 50kA Surge Current Rating
- Visual fault indicator and remote contacts
- 10-Year warranty

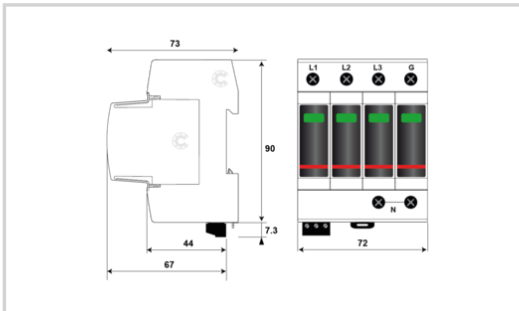

Electrical Characteristics

| | | |
|--|------------------------|-------------------------|
| Total Maximum discharge current <i>max. total withstand @ 8/20 μs</i> | I _{max} Total | 200 kA |
| POWER SPD TYPE | | UL1449 5th Ed. TYPE 4CA |
| VOLTS | (V) | 208/120 |
| AC/DC/DC PV/RF | | AC |
| PHASE | (PH) | 3Y |
| AMPS | (A) | N/A |
| AMBIENT MIN | (C) | -40 |
| AMBIENT MAX | (C) | +85 |
| MODES | | L-L, L-N, L-G, N-G |
| MLV | (V) | 6620/6620/3310/3240 |
| MCOV | (V) | 610/305/305/305 |
| IN 15 impulses 8/20μs | (kA) | 20 |
| SCCR | (kA) | n/a |
| IMAX 8/20μs | (kA) | 50 |

Mechanical Characteristics

| | | |
|-------------------------|--|---|
| Connection to Network | | By screw terminals: 2.5-25mm ² (35mm ² rigid) |
| Weight | | 0.338 kg |
| TECHNOLOGY | | MOV-GSG |
| NETWORK CONFIGURATION | | 4 pole, 4W+G, 3PH Wye |
| CONNECTION METHOD | | Screw Terminal (4-13AWG) |
| MOUNTING | | Din Rail |
| MATERIAL | | Thermoplastic UL94-V0 |
| NEMA RATING (IP RATING) | | NEMA 2 (IP20) |
| FAIL-SAFE BEHAVIOR | | Disconnection via fuse-link |
| REAL-TIME DIAGNOSTICS | | Visual indicator and remote contacts |
| DIMENSIONS | | See diagram |
| WEIGHT | | 0.75 lbs |

Standards

| | | |
|-------------------------|--|--------------------------------------|
| Certification | | UL Recognized |
| UL STANDARD | | UL1449 5th Edition |
| UL CATEGORY | | VZCA2 |
| UL FILE NUMBER | | E326289 |
| STANDARDS | | NOM-003-SCFI-2014, NOM-001-SCFI-1993 |
| ENVIRONMENTAL STANDARDS | | ROHS |

| | | |
|--------------------|---------------------|--|
| Part number | 821130124551 | |
|--------------------|---------------------|--|

