





- Hybrid SAD-GDT Technology
- UL497B LISTED
- 20kA I<sub>max</sub> (1x-8/20us)
- 5kA I<sub>imp</sub> (2x-10/350us)
- 5kA I<sub>n</sub> (10x-8/20us)
- Modular
- 2W+SHIELD+G

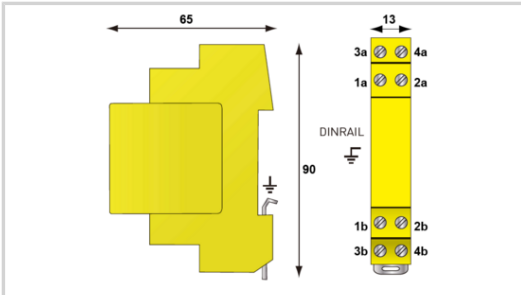

Electrical Characteristics		
DATA SPD TYPE		UL Listed for Hazardous Locations
VOLTS	(V)	24
WIRES		2W+Shield+G
LINE CURRENT MAX	(A)	0.3
AMBIENT MIN	(C)	-40
AMBIENT MAX	(C)	+85
RESIDUAL VOLTAGE	(V)	40
MCOV	(V)	28
IN	(kA)	5
<i>10 impulses 8/20μs</i>		
IMAX	(kA)	20
<i>8/20μs</i>		
I <sub>imp</sub>	(kA)	5
<i>10/350μs</i>		

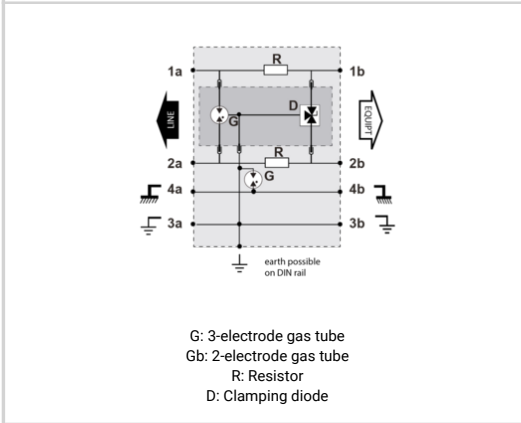

Mechanical Characteristics		
TECHNOLOGY		SAD-GDT
NETWORK CONFIGURATION		1 Channel (2W+SHIELD+G)
CONNECTION METHOD		Screw terminal
MOUNTING		Din rail
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
DIMENSIONS		See diagram
WEIGHT		0.30 lbs
SPARE PART		DLAM-24D3

Standards		
Certification		UL Listed
UL STANDARD		UL497B & UL121201 Hazardous Location
UL CATEGORY		QVGG & QVSI
UL FILE NUMBER		E184939 & E527349
UL121201 HAZARDOUS LOCATION		Class I, Division 2, Groups A, B, C & D: Operating. Temp. T5
STANDARDS		IEC 61643-11, NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS		ROHS

Part number		
		897014

