




- Protection against permanent/temporary overvoltages of AC network
- For 277 Vac AC single-phase powerline
- Load current: up to 16 A
- Automatic operation: disconnection/reconnection
- Operating indicator
- installation on DIN rail

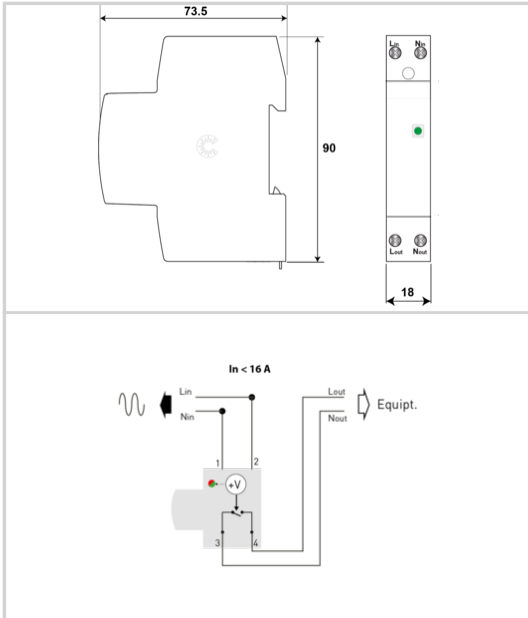

Características eléctricas		
PROTECTS AGAINST PERMANENT AND TEMPORARY OVERVOLTAGES		YES
TENSION	(V)	277
FASE	(PH)	1
MAX LOAD CURRENT	A	16
Características mecánicas		
FORMA DE CONEXION		By screw terminals: 1.5-10mm <sup>2</sup>
MIN DISCONNECTION TIME DURING AC OVERVOLTAGE		3s @330VAC/1s @344VAC/0.25s @372VAC/0.07s @400VAC
MONTAJE		DIN RAIL
DIMENSIONS		See diagram (mm)
Código		
358913		