





CITEL DS43S-120

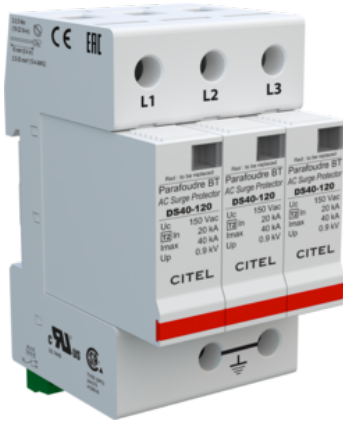

Type 2 AC Multipolar surge protector

- ↳ In : 20 kA
- ↳ I_{max} total : 40 kA
- ↳ Pluggable module for each phase
- ↳ Remote signaling option
- ↳ NF EN 61643-11, CEI 61643-11 complianc

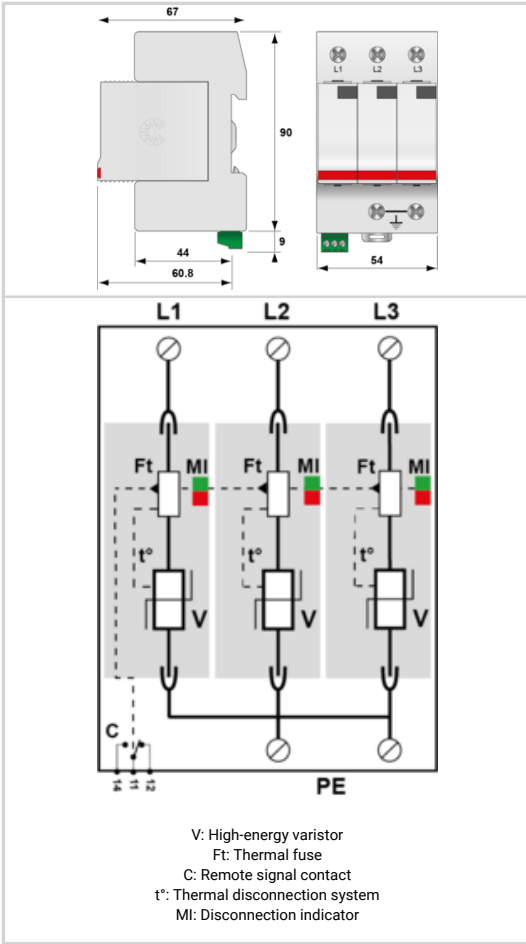

Electrical Characteristics		
Network		120/208 V 3-phase
Total Maximum discharge current <i>max. total withstand @ 8/20 μs</i>	I _{max} Total	120 kA
Protection mode(s)		Common mode
POWER SPD TYPE		UL1449 5th Ed. TYPE 4CA
VOLTS	(V)	240/120
AC/DC/DC PV/RF		AC
PHASE	(PH)	1S
AMPS	(A)	N/A
AMBIENT MIN	(C)	-35
AMBIENT MAX	(C)	+60
MODES		L-L, L-N, L-G, N-G
MLV	(V)	1960/-/1240/-
MCOV	(V)	300/-/150/-
IN	(kA)	20
15 impulses 8/20μs		
SCCR	(kA)	n/a
IMAX	(kA)	40
8/20μs		
Iimp	(kA)	4
10/350μs		
Option		
Remote status dry contact electrical ratingMax Voltage	V	250.0000
Remote status dry contact electrical ratingMax Current	A	0.5000
RFI Filter		no
Installation		
Wiring type		Screw
Solid wire cross sectionMin	mm ²	2.5000
Solid Wire cross sectionMax	mm ²	35.0000
Stranded Wire cross sectionMin	mm ²	2.5000
Stranded wire cross sectionMax	mm ²	25.0000
Wire gaugeMin	AWG	13.0000
Wire gaugeMax	AWG	2.0000
Torque	Nm	2.0 - 2.5
Torque	in-lbs	17.8 - 22.1
Strip Length	mm	13.0000
Strip Length	in	0.5000
Operating TemperatureMin	°C	-40.0000
Operating TemperatureMax	°C	85.0000
Operating TemperatureMin	°F	-40.0000
Operating TemperatureMax	°F	85.0000
Operating Relative HumidityMax	%RH	95
Operating AltitudeMin	Ft	2000.0000
Operating AltitudeMax	Ft	6500.0000
Housing/Enclosure material		Thermoplastic
Flammability ratingUL 94		V0
Mounting		Din Rail
IP Environmental ratingIP		IP20
NEMA Environmental ratingNEMA		NEMA 1
Installation Location		Indoor
Spare part		Module
Product DimensionL	mm	99.0000
Product DimensionH	mm	67.0000
Product DimensionW	mm	54.0000
Product DimensionL	In	3.8900
Product DimensionH	In	2.6400

DS43S-120

Product Dimension W	In	2.1300
Miscellaneous		
Individual Pack		Yes
Storage Temperature Min	°C	-40.0000
Storage Temperature Max	°C	85.0000
Storage Temperature Min	°F	-40.0000
Storage Temperature Max	°F	85.0000
Storage Relative Humidity Max	%RH	95.0000
Mechanical Characteristics		
Technology		MOV
Connection to Network		By screw terminals: 2.5-25mm ² / by bus
Format		Plug-in modular box
Failsafe mode		Disconnection from AC network
Weight		0.255 kg
TECHNOLOGY		MOV
NETWORK CONFIGURATION		1PH, 3W+G, Split Phase
CONNECTION METHOD		SPD-Screw Terminal (8-12AWG), Terminal blocks 6AWG
MOUNTING		Din Rail
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
FAIL-SAFE BEHAVIOR		Disconnection via fuse-link
REAL-TIME DIAGNOSTICS		Visual indicator and remote contacts
DIMENSIONS		See diagram
WEIGHT		0.90 lbs
SPARE PART		DSM40-120
Standards		
Certification		CSA / UL Listed
UL STANDARD		UL1449 5th Edition
UL CATEGORY		VZCA2, VZCA8
UL FILE NUMBER		E326289
STANDARDS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS		ROHS
Part number		
461623		