




- ↳ Hybrid MOV-GSG Technology
- ↳ UL1449 Type 2 LISTED
- ↳ 50kA Surge Current Rating per mode
- ↳ Extended life with no leakage current
- ↳ Visual LED fault indicator and audible alarm
- ↳ NEMA 6 (exceeds NEMA 4X or 4)
- ↳ UL1283 Filter
- ↳ 10-Year warranty

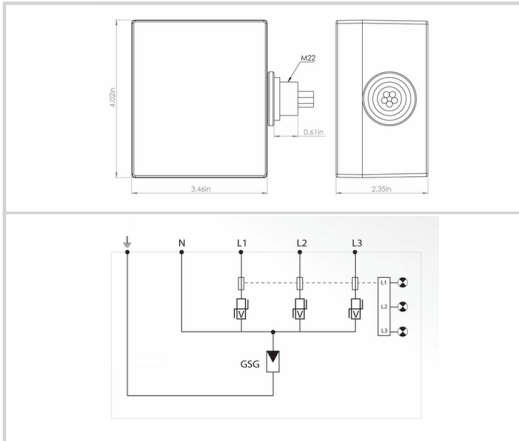

Electrical Characteristics		
Total Maximum discharge current <i>max. total withstand @ 8/20 μs</i>	I <sub>max</sub> Total	50 kA
Let through Voltage <i>U<sub>res</sub> at 20kA</i>	V	1500.0000
POWER SPD TYPE		UL1449 TYPE 2 LISTED
VOLTS	(V)	120/208
AC/DC/DC PV/RF		AC
PHASE	(PH)	3Y
AMPS	(A)	N/A
AMBIENT MIN	(C)	-35
AMBIENT MAX	(C)	+80
MODES		L-L, L-N, L-G, N-G
VPR	(V)	1200/700/1200/1200
MCOV	(V)	280/140/140/120
IN <i>15 impulses 8/20μs</i>	(kA)	20
SCCR	(kA)	150
IMAX <i>8/20μs</i>	(kA)	50
Option		
RFI Filter		Yes
Installation		
Operating Temperature <sub>Min</sub>	°C	-40.0000
Operating Temperature <sub>Max</sub>	°C	85.0000
Operating Temperature <sub>Min</sub>	°F	-40.0000
Operating Temperature <sub>Max</sub>	°F	85.0000
Operating Relative Humidity <sub>Max</sub>	%RH	Can be submerged
Operating Altitude <sub>Min</sub>	Ft	2000.0000
Operating Altitude <sub>Max</sub>	Ft	6500.0000
Housing/Enclosure material		Aluminum cast
Mounting		Side mount
IP Environmental rating <sub>IP</sub>		IP66
NEMA Environmental rating <sub>NEMA</sub>		NEMA 6
Installation Location		Indoor / outdoor
Accessories		brackets
Product Dimension <sub>L</sub>	mm	102.0000
Product Dimension <sub>H</sub>	mm	62.0000
Product Dimension <sub>W</sub>	mm	88.0000
Product Dimension <sub>L</sub>	In	4.0160
Product Dimension <sub>H</sub>	In	2.4410
Product Dimension <sub>W</sub>	In	3.4650
Miscellaneous		
Individual Pack		Yes
Storage Temperature <sub>Min</sub>	°C	-40.0000
Storage Temperature <sub>Max</sub>	°C	85.0000
Storage Temperature <sub>Min</sub>	°F	-40.0000
Storage Temperature <sub>Max</sub>	°F	85.0000
Mechanical Characteristics		
Connection to Network		By wire 15 AWG (1.5mm <sup>2</sup> ). long. 600mm
Weight		1.086 kg
TECHNOLOGY		MOV-GSG
NETWORK CONFIGURATION		3PH, 4W+G, Wye
CONNECTION METHOD		36" #12 AWG LEADS
MOUNTING		SIDE MOUNT, THREADED M22 (1/4" NPT ADAPTER)
MATERIAL		Aluminum cast
NEMA RATING (IP RATING)		6
FAIL-SAFE BEHAVIOR		Yes, no upstream over current protection required

REAL-TIME DIAGNOSTICS	LED and audible alarm
DIMENSIONS	See diagram
WEIGHT	2.5 lbs.
<b>Standards</b>	
UL STANDARD	UL1449 5th Edition
UL CATEGORY	VZCA, VZCA7
UL FILE NUMBER	E326289
STANDARDS	NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS	ROHS
<b>Part number</b>	
<b>750101</b>	