




- ↳ Hybrid MOV-GSG Technology
- ↳ UL1449 Type 2 LISTED
- ↳ 50kA Surge Current Rating per mode
- ↳ Extended life with no leakage current
- ↳ Visual LED fault indicator and audible alarm
- ↳ NEMA 6 (exceeds NEMA 4X or 4)
- ↳ UL1283 Filter
- ↳ 10-Year warranty

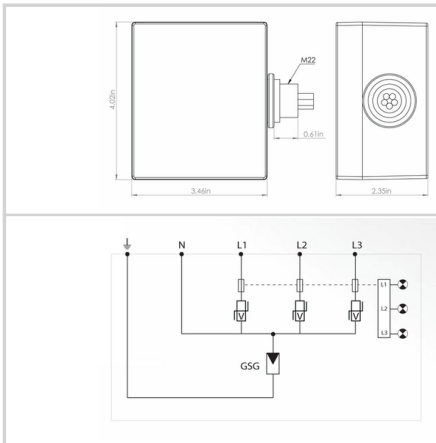

### Características eléctricas

|   |               |                      |
|---|---------------|----------------------|
| Corriente de descarga máxima total<br>Capacidad máx. total en onda 8/20µs | Imax<br>Total | 50 kA                |
| Let through Voltage   | V             | 1500.0000            |
| POWER SPD TYPE  |               | UL1449 TYPE 2 LISTED |
| TENSION   | (V)           | 120/208              |
| AC/DC/DC PV/RF  |               | AC                   |
| FASE  | (PH)          | 3Y                   |
| AMPS  | (A)           | N/A                  |
| AMBIENT MIN   | (C)           | -35                  |
| AMBIENT MAX   | (C)           | +80                  |
| MODOS   |               | L-L, L-N, L-G, N-G   |
| VPR   | (V)           | 1200/700/1200/1200   |
| MCOV  | (V)           | 280/140/140/120      |
| IN  | (kA)          | 20                   |
| Icc<br>cortocircuito  | (kA)          | 150                  |
| IMAX  | (kA)          | 50                   |

### Opción

|            |  |     |
|------------|--|-----|
| RFI Filter |  | Yes |
|------------|--|-----|

### Instalación

|                             |     |                  |
|-----------------------------|-----|------------------|
| Operating Temperature       | °C  | -40.0000         |
| Operating Temperature       | °C  | 85.0000          |
| Operating Temperature       | °F  | -40.0000         |
| Operating Temperature       | °F  | 85.0000          |
| Operating Relative Humidity | %RH | Can be submerged |
| Operating Altitude          | Ft  | 2000.0000        |
| Operating Altitude          | Ft  | 6500.0000        |
| Housing/Enclosure material  |     | Aluminum cast    |
| Mounting                    |     | Side mount       |
| IP Environmental rating     |     | IP66             |
| NEMA Environmental rating   |     | NEMA 6           |
| Installation Location       |     | Indoor / outdoor |
| Accesorio                   |     | Soportes         |
| Product Dimension           | mm  | 102.0000         |
| Product Dimension           | mm  | 62.0000          |
| Product Dimension           | mm  | 88.0000          |
| Product Dimension           | In  | 4.0160           |
| Product Dimension           | In  | 2.4410           |
| Product Dimension           | In  | 3.4650           |

### Miscelánea

|                     |    |          |
|---------------------|----|----------|
| Individual Pack     |    | Yes      |
| Storage Temperature | °C | -40.0000 |
| Storage Temperature | °C | 85.0000  |
| Storage Temperature | °F | -40.0000 |
| Storage Temperature | °F | 85.0000  |

### Características mecánicas

|                         |  |  |
|-------------------------|--|--|
| Conexión a la red       |  | Por hilos 15 AWG (1.5 mm <sup>2</sup> ). long. 600mm |
| Peso                    |  | 1.086 kg   |
| TECNOLOGIA              |  | MOV-GSG  |
| CONFIGURACION DE RED    |  | 3PH, 4W+G, Wye                                       |
| FORMA DE CONEXION       |  | 36° #12 AWG LEADS                                    |
| MONTAJE                 |  | SIDE MOUNT, THREADED M22 (1/4" NPT ADAPTER)          |
| MATERIAL                |  | Aluminum cast  |
| NEMA RATING (IP RATING) |  | 6  |
| DESCONEXION SEGURA      |  | Yes, no upstream over current protection required    |
| REAL-TIME DIAGNOSTICS   |  | LED and audible alarm                                |
| DIMENSIONS              |  | See diagram  |

|                         |                                      |
|-------------------------|--------------------------------------|
| WEIGHT                  | 2.5 lbs.                             |
| <b>Normas</b>           |                                      |
| UL STANDARD             | UL1449 5th Edition                   |
| UL CATEGORY             | VZCA, VZCA7                          |
| UL FILE NUMBER          | E326289                              |
| NORMAS                  | NOM-003-SCFI-2014, NOM-001-SCFI-1993 |
| ENVIRONMENTAL STANDARDS | ROHS                                 |
| <b>Código</b>           |                                      |
| <b>750101</b>           |                                      |