






UL121201 Hazardous Locations- I_{max} 40kA - In 20kA - Modular

CITEL

DS43S-320

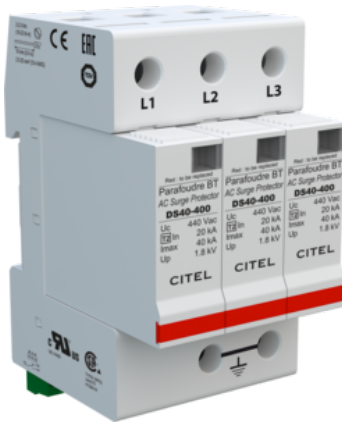

- MOV Technology
- UL1449 Type 4CA
- 40kA Surge Current Rating
- Visual fault indicator and remote contacts
- 10-Year warranty

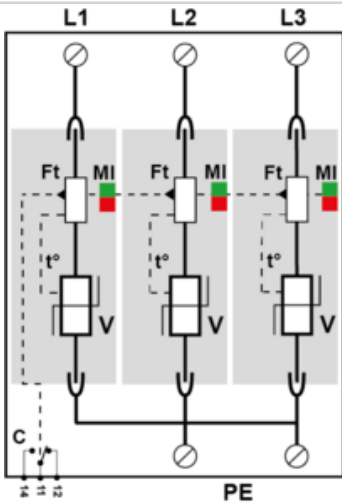

Características eléctricas

POWER SPD TYPE	UL1449 5th Ed. TYPE 4CA
AC/DC/DC PV/RF	AC
FASE	(PH) 3Y
AMPS	(A) N/A
AMBIENT MIN	(C) -35
AMBIENT MAX	(C) +60
MODOS	L-L, L-N, L-G, N-G
MLV	(V) 2930/-/1770/-
MCOV	(V) 600/-/320/-
IN	(kA) 20
I _{cc}	(kA) n/a
cortocircuito	(kA) 40
IMAX	(kA) 4
I _{imp}	(kA) 4

Características mecánicas

Peso	0.282 kg
TECNOLOGIA	MOV
CONFIGURACION DE RED	1PH, 3W+G, Split Phase
FORMA DE CONEXION	SPD-Screw Terminal (8-12AWG), Terminal blocks 6AWG
MONTAJE	Din Rail
MATERIAL	Thermoplastic UL94-V0
NEMA RATING (IP RATING)	NEMA 2 (IP20)
DESCONEXION SEGURA	Disconnection via fuse-link
REAL-TIME DIAGNOSTICS	Visual indicator and remote contacts
DIMENSIONS	See diagram
WEIGHT	0.90 lbs
SPARE PART	DSM40-400

Normas

Certificación	CSA / UL Listed
UL STANDARD	UL1449 5th Edition
UL CATEGORY	VZCA2, VZCA8
UL FILE NUMBER	E326289
NORMAS	NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS	ROHS

Código

461923

