




- Coaxial surge protector
- I_{max} : 20 kA
- Up to 1 GHz
- Connectors : BNC, F, TNC, TV(SE) EJ167

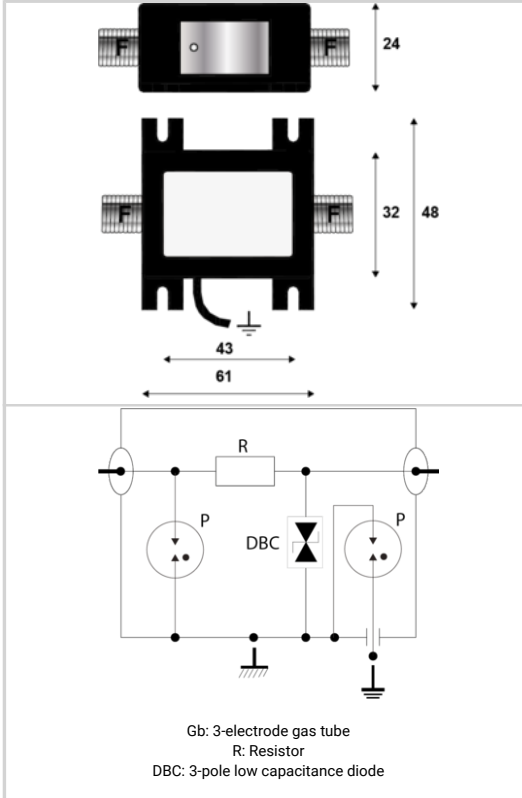

Electrical Characteristics			
Max. DC operating voltage	Uc	10 Vdc	
Insertion loss		≤ 0.5 dB	
Return loss		≥ 20 dB	
Impedance		50/75 ohms	
VSWR		< 1.3:1	
Max. load current @25°C	IL	0.5 A	
Protection mode(s)		Common mode	
Impulse current 2 x 10/350µs Test - D1 Category	limp	2.5 kA	
Nominal discharge current C2 Category	In	5 kA	
Max Power		4 W	
DC Pass		No	
Return Loss Minimum	db	>20	
VSWR Maximum	:1	<1.2:1	
Max Discharge Current I _{max} (8/20µs x 1)	kA	20.0000	
Max Total Discharge Current I _{max} (8/20µs x 1)	kA	20.0000	
Max Discharge Current I _{max} (8/20µs x 1)	kA	20.0000	
Max Discharge Current I _{max} (8/20µs x 1)	kA	20.0000	
Max Discharge Current I _{max} (8/20µs x 1)	kA	20.0000	
Max Discharge Current I _{max} (8/20µs x 1)	kA	20.0000	
Installation			
Operating Temperature _{Min}	°C	-40.0000	
Operating Temperature _{Max}	°C	85.0000	
Operating Temperature _{Min}	°F	-40.0000	
Operating Temperature _{Max}	°F	85.0000	
Operating Relative Humidity _{Max}	%RH	95	
Operating Altitude _{Min}	Ft	2000.0000	
Operating Altitude _{Max}	Ft	6500.0000	
Housing/Enclosure material		Metal + Plastic	
Mounting		Surface mount	
IP Environmental rating/IP		IP20	
Installation Location		outdoor	
Accessories		90° Stainless steel bracket	
Product Dimension _L	mm	61.0000	
Product Dimension _H	mm	24.0000	
Product Dimension _W	mm	48.0000	
Product Dimension _L	In	2.4000	
Product Dimension _H	In	0.9400	
Product Dimension _W	In	1.8800	
Miscellaneous			
Individual Pack		No	
Storage Temperature _{Min}	°C	-40.0000	
Storage Temperature _{Max}	°C	85.0000	
Storage Temperature _{Min}	°F	-40.0000	
Storage Temperature _{Max}	°F	85.0000	
Installation			
Cable type		Coax	
Mechanical Characteristics			
Connection to Network		Connector F Female/Female	
Part number			
632602			