


MSB10-480(UL)



- MOV Technology
- I_{max} 18kA
- I_n 3kA
- LED Indicator
- IP67
- ANSI/IEEE C136.2 Extreme 20kV/10kA
- ANSI/IEEE C62.41 20kV/10kA
- UL Type 4CA
- 10-year warranty

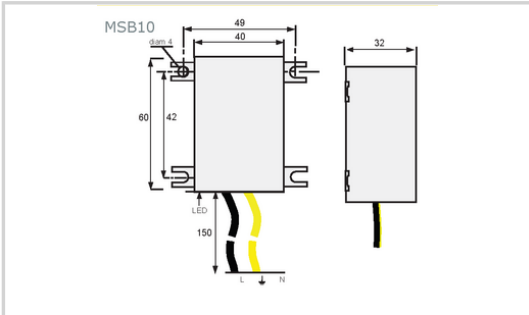

Características eléctricas	
Red	347-480 Vac monofásica
Modo(s) de protección	Modo Común o Mode Diferenciado
POWER SPD TYPE	UL1449 5th Ed. TYPE 4CA
TENSION	(V) 480/277
AC/DC/DC PV/RF	AC
FASE	(PH) 3Y
AMPS	(A) N/A
AMBIENT MIN	(C) -35
AMBIENT MAX	(C) +85
MODOS	L-N, L-G, N-G
MLV	(V) 1760/1750/1730
MCOV	(V) 550/550/550
I _N	(kA) 3
I _{cc} cortocircuito	(kA) n/a
I _{MAX}	(kA) 18
Características mecánicas	
Tecnología	MOV
Conexión a la red	Salida por hilos
Modo de fallo	Desconexión de la red Baja Tensión
TECNOLOGIA	Thermal-MOV
CONFIGURACION DE RED	2W+G
FORMA DE CONEXION	18" #14 AWG LEADS
MONTAJE	FLANGE MOUNT
MATERIAL	Thermoplastic UL94-V0
NEMA RATING (IP RATING)	NEMA 6P (IP67)
DESCONEXION SEGURA	Disconnection via fuse-link
REAL-TIME DIAGNOSTICS	LED Indicator
DIMENSIONS	See diagram
WEIGHT	0.30 lbs
SPARE PART	n/a
Normas	
Certificación	UL
UL STANDARD	UL1449 5th Edition
UL CATEGORY	VZCA2, VZCA8
UL FILE NUMBER	E326289
NORMAS	NOM-003-SCFI-2014, NOM-001-SCFI-1993
ANSI/IEEE C62.41	Category C 20kV/10kA
ANSI/IEEE C136.2	Extreme Category 20kV/10kA
ENVIRONMENTAL STANDARDS	ROHS
Código	
561801	

