




CITEL

DS71US-210



- Multi-MOV Technology
- UL1449 Type 1 LISTED
- IEC Type 1+2
- 75kA Surge Current Rating per module
- Visual fault indicator and remote contacts
- Replaceable Modules
- 10-Year warranty

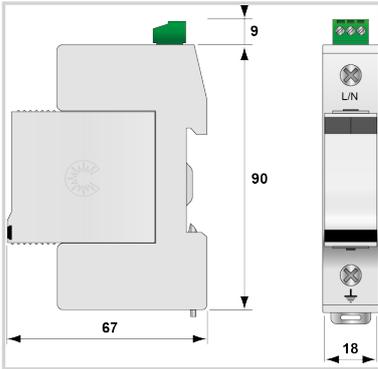

Electrical Characteristics

POWER SPD TYPE		UL1449 5th Ed. TYPE 1
VOLTS	(V)	120
AC/DC/DC PV/RF		AC
PHASE	(PH)	1
AMPS	(A)	N/A
AMBIENT MIN	(C)	-40
AMBIENT MAX	(C)	+85
MODES		L-G
VPR	(V)	700
MCOV	(V)	210
I _N	(kA)	20
15 impulses 8/20μs		
SCCR	(kA)	200
I _{MAX}	(kA)	75
8/20μs		
RELATIVE HUMIDITY	(%)	95%

Mechanical Characteristics

TECHNOLOGY		Multi-MOV
NETWORK CONFIGURATION		2 wires
CONNECTION METHOD		Screw Terminal, 13-2AWG Solid Wire, 13-4AWG Stranded Wire
MOUNTING		Din Rail
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
FAIL-SAFE BEHAVIOR		Yes, no upstream over current protection required
REAL-TIME DIAGNOSTICS		Visual indicator and remote contacts
DIMENSIONS		See diagram
WEIGHT		0.29 lbs

Standards

Certification		CSA / UL Listed
Environmental standards		EU RoHS
UL STANDARD		UL1449 5th Edition
UL CATEGORY		VZCA, VZCA7
UL FILE NUMBER		E326289
STANDARDS		NOM-003-SCFI-2014, NOM-001-SCFI-1993

Part number

32271155

